

# MICHELIN AGRIBIB

Traction

Service life

Stubble resistance



**High levels of performance throughout its life**

- Optimal traction level
- Special tread pattern for excellent self-cleaning capacity

**Service life**

- Deep tread lugs for a longer service life

**Stubble resistance**

- Proven radial casing endurance
- Damage-resistant rubber

**Optimized tread pattern**


- Lug angle 45° for better transfer of tractive force to the ground
- Hinge in the center of the tread aids self-cleaning

**Deep tread lugs**

- R1W lug
- Lug design: straight profile



**Damage-resistant rubber**

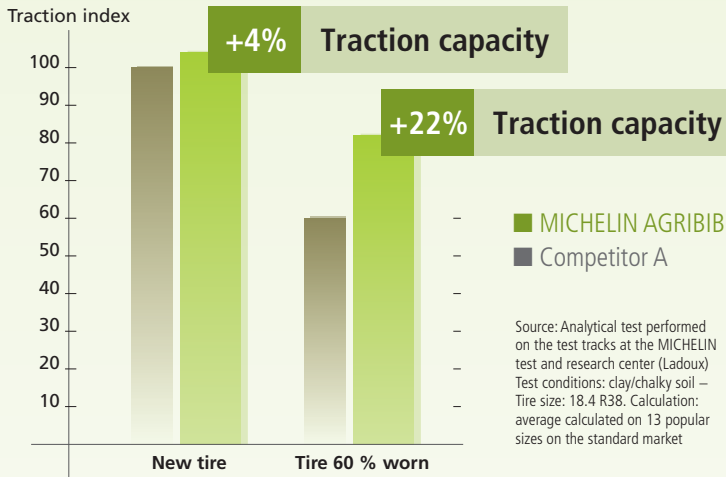

**Sizes**

9.5	R24 TL 107A8/104B	380/85	R30 TL 135A8/135B	380/80	R38 TL 142A8/139D
11.2	R24 TL 114A8/111B	420/90	R30 TL 147A8/147B	380/95	R38 TL 147A8/147B <b>NEW</b>
12.4	R24 TL 119A8/116B	18.4	R34 TL 144A8/141B	420/85	R38 TL 144A8/144B
13.6	R24 TL 121A8/118B	320/85	R34 TL 133A8/130B	520/85	R38 TL 155A8/155B
14.9	R24 TL 126A8/123B	380/85	R34 TL 137A8/137B	480/80	R42 TL 156A8/156B
16.9	R24 TL 134A8/131B	420/85	R34 TL 142A8/142B	520/85	R42 TL 157A8/157B
12.4	R28 TL 121A8/118B	12.4	R36 TL 124A8/121B	420/80	R46 TL 151A8/148B
13.6	R28 TL 123A8/120B	12.4	R38 TL 125A8/122B	480/80	R46 TL 158A8/158B
14.9	R28 TL 128A8/125B	13.6	R38 TL 128A8/125B	520/85	R46 TL 158A8/155B
16.9	R28 TL 136A8/133B	18.4	R38 TL 146A8/143B	480/80	R50 TL 159A8/159B
16.9	R30 TL 137A8/134B	20.8	R38 TL 153A8/150B	480/95	R50 TL 164A8/164B <b>NEW</b>
18.4	R30 TL 142A8/139B				



### 9.5 R24 107A8/104B TL AGRIBIB

MSPN: 57821

CAI: 123932

Load per tire (single)				
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	Pressure
		1,280 lbs	1,650 lbs	7 psi
		580 kgs	750 kgs	0.5 bar
1,300 lbs	1,390 lbs	1,500 lbs	1,900 lbs	9 psi
590 kgs	630 kgs	680 kgs	860 kgs	0.6 bar
1,430 lbs	1,540 lbs	1,650 lbs	2,090 lbs	12 psi
650 kgs	700 kgs	750 kgs	950 kgs	0.8 bar
1,580 lbs	1,700 lbs	1,820 lbs	2,300 lbs	15 psi
715 kgs	770 kgs	825 kgs	1,045 kgs	1.0 bar
1,710 lbs	1,850 lbs	1,970 lbs	2,500 lbs	17 psi
775 kgs	840 kgs	895 kgs	1,135 kgs	1.2 bar
1,850 lbs	2,010 lbs	2,140 lbs	2,710 lbs	20 psi
840 kgs	910 kgs	970 kgs	1,230 kgs	1.4 bar
1,980 lbs	2,160 lbs	2,290 lbs	2,910 lbs	23 psi
900 kgs	980 kgs	1,040 kgs	1,320 kgs	1.6 bar
			3,020 lbs	25 psi
			1,370 kgs	1.7 bar
			3,120 lbs	26 psi
			1,415 kgs	1.8 bar
			3,220 lbs	28 psi
			1,460 kgs	1.9 bar

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

Tire Technical Data																
Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)												
Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference													
9.7 in	40.9 in	18.6 in	121.9 in	<b>W8</b> W7												
247 mm	1,040 mm	472 mm	3,097 mm													
<table border="1"> <tr><th colspan="2">Rolling Circumference Index</th></tr> <tr><td colspan="2">35</td></tr> <tr><th colspan="2">Number of Lugs</th></tr> <tr><td colspan="2">18 x 2</td></tr> </table>				Rolling Circumference Index		35		Number of Lugs		18 x 2		Tube MSPN 62910				
Rolling Circumference Index																
35																
Number of Lugs																
18 x 2																
<table border="1"> <tr><th>Gross Flat Plate</th><th>Tire Weight</th><th>100% Tire Volume</th><th>Centerline Tread Depth</th></tr> <tr><td>103 sq in</td><td>69 lbs</td><td>22.7 gals</td><td>40/32nd</td></tr> <tr><td>667 sq cm</td><td>31 kgs</td><td>86 liters</td><td>32 mm</td></tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	103 sq in	69 lbs	22.7 gals	40/32nd	667 sq cm	31 kgs	86 liters	32 mm	Tube CAI 170035
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth													
103 sq in	69 lbs	22.7 gals	40/32nd													
667 sq cm	31 kgs	86 liters	32 mm													
				Minimum Dual/Triple Spacing												
				13.4 in												
				340 mm												

### 11.2 R24 114A8/111B TL AGRIBIB

MSPN: 70146

CAI: 123864

Load per tire (single)				
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	Pressure
		1,570 lbs	1,980 lbs	7 psi
		710 kgs	900 kgs	0.5 bar
1,590 lbs	1,700 lbs	1,810 lbs	2,290 lbs	9 psi
720 kgs	770 kgs	820 kgs	1,040 kgs	0.6 bar
1,750 lbs	1,870 lbs	2,010 lbs	2,540 lbs	12 psi
795 kgs	850 kgs	910 kgs	1,150 kgs	0.8 bar
1,920 lbs	2,060 lbs	2,190 lbs	2,790 lbs	15 psi
870 kgs	935 kgs	995 kgs	1,265 kgs	1.0 bar
2,070 lbs	2,240 lbs	2,390 lbs	3,030 lbs	17 psi
940 kgs	1,015 kgs	1,085 kgs	1,375 kgs	1.2 bar
2,240 lbs	2,430 lbs	2,580 lbs	3,280 lbs	20 psi
1,015 kgs	1,100 kgs	1,170 kgs	1,490 kgs	1.4 bar
2,400 lbs	2,600 lbs	2,780 lbs	3,530 lbs	23 psi
1,090 kgs	1,180 kgs	1,260 kgs	1,600 kgs	1.6 bar
			3,660 lbs	25 psi
			1,660 kgs	1.7 bar
			3,780 lbs	26 psi
			1,715 kgs	1.8 bar
			3,900 lbs	28 psi
			1,770 kgs	1.9 bar

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

Tire Technical Data																
Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)												
Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference													
11.6 in	43.0 in	19.6 in	129.6 in	<b>W10</b> W9												
294 mm	1,092 mm	498 mm	3,292 mm													
<table border="1"> <tr><th colspan="2">Rolling Circumference Index</th></tr> <tr><td colspan="2">36</td></tr> <tr><th colspan="2">Number of Lugs</th></tr> <tr><td colspan="2">19 x 2</td></tr> </table>				Rolling Circumference Index		36		Number of Lugs		19 x 2		Tube MSPN 82631				
Rolling Circumference Index																
36																
Number of Lugs																
19 x 2																
<table border="1"> <tr><th>Gross Flat Plate</th><th>Tire Weight</th><th>100% Tire Volume</th><th>Centerline Tread Depth</th></tr> <tr><td>131 sq in</td><td>88 lbs</td><td>32.5 gals</td><td>47/32nd</td></tr> <tr><td>848 sq cm</td><td>40 kgs</td><td>123 liters</td><td>37 mm</td></tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	131 sq in	88 lbs	32.5 gals	47/32nd	848 sq cm	40 kgs	123 liters	37 mm	Tube CAI 170037
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth													
131 sq in	88 lbs	32.5 gals	47/32nd													
848 sq cm	40 kgs	123 liters	37 mm													
				Minimum Dual/Triple Spacing												
				15.4 in												
				392 mm												

NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%



# MICHELIN AGRIBIB

## 12.4 R24 119A8/116B TL AGRIBIB

MSPN: 78449

CAI: 123788

Load per tire (single)						Tire Technical Data											
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	Pressure	Unloaded Dimensions	Loaded Dimensions			Rims (preferred in bold)								
		1,790 lbs 810 kgs	2,290 lbs 1,040 kgs	7 psi 0.5 bar	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference									
1,830 lbs 830 kgs	1,940 lbs 880 kgs	2,090 lbs 950 kgs	2,650 lbs 1,200 kgs	9 psi 0.6 bar	12.8 in 324 mm	45.2 in 1,149 mm	20.5 in 520 mm	134.6 in 3,420 mm	<b>W11</b> W10								
2,020 lbs 915 kgs	2,150 lbs 975 kgs	2,310 lbs 1,050 kgs	2,930 lbs 1,330 kgs	12 psi 0.8 bar	<table border="1"> <tr> <th colspan="2">Rolling Circumference Index</th> </tr> <tr> <td colspan="2">37</td> </tr> <tr> <th colspan="2">Number of Lugs</th> </tr> <tr> <td colspan="2">19 x 2</td> </tr> </table>					Rolling Circumference Index		37		Number of Lugs		19 x 2	
Rolling Circumference Index																	
37																	
Number of Lugs																	
19 x 2																	
2,200 lbs 1,000 kgs	2,360 lbs 1,070 kgs	2,550 lbs 1,155 kgs	3,220 lbs 1,460 kgs	15 psi 1.0 bar	<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th rowspan="2">Minimum Dual/Triple Spacing</th> </tr> <tr> <td>155 sq in 998 sq cm</td> <td>113 lbs 51 kgs</td> <td>40.7 gals 154 liters</td> <td>52/32nd 41 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	155 sq in 998 sq cm	113 lbs 51 kgs	40.7 gals 154 liters	52/32nd 41 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing													
155 sq in 998 sq cm	113 lbs 51 kgs	40.7 gals 154 liters	52/32nd 41 mm														
2,380 lbs 1,080 kgs	2,580 lbs 1,170 kgs	2,770 lbs 1,255 kgs	3,510 lbs 1,590 kgs	17 psi 1.2 bar	<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th rowspan="2">Minimum Dual/Triple Spacing</th> </tr> <tr> <td>168 sq in 1,086 sq cm</td> <td>135 lbs 61 kgs</td> <td>53.4 gals 202 liters</td> <td>54/32nd 43 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing													
168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm														
2,570 lbs 1,165 kgs	2,790 lbs 1,265 kgs	3,000 lbs 1,360 kgs	3,780 lbs 1,715 kgs	20 psi 1.4 bar	<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th rowspan="2">Minimum Dual/Triple Spacing</th> </tr> <tr> <td>168 sq in 1,086 sq cm</td> <td>135 lbs 61 kgs</td> <td>53.4 gals 202 liters</td> <td>54/32nd 43 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing													
168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm														
2,760 lbs 1,250 kgs	3,000 lbs 1,360 kgs	3,220 lbs 1,460 kgs	4,070 lbs 1,845 kgs	23 psi 1.6 bar	<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th rowspan="2">Minimum Dual/Triple Spacing</th> </tr> <tr> <td>168 sq in 1,086 sq cm</td> <td>135 lbs 61 kgs</td> <td>53.4 gals 202 liters</td> <td>54/32nd 43 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing													
168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm														
			4,210 lbs 1,910 kgs	25 psi 1.7 bar	<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th rowspan="2">Minimum Dual/Triple Spacing</th> </tr> <tr> <td>168 sq in 1,086 sq cm</td> <td>135 lbs 61 kgs</td> <td>53.4 gals 202 liters</td> <td>54/32nd 43 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing													
168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm														
			4,350 lbs 1,975 kgs	26 psi 1.8 bar	<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th rowspan="2">Minimum Dual/Triple Spacing</th> </tr> <tr> <td>168 sq in 1,086 sq cm</td> <td>135 lbs 61 kgs</td> <td>53.4 gals 202 liters</td> <td>54/32nd 43 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing													
168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm														
			4,500 lbs 2,040 kgs	28 psi 1.9 bar	<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th rowspan="2">Minimum Dual/Triple Spacing</th> </tr> <tr> <td>168 sq in 1,086 sq cm</td> <td>135 lbs 61 kgs</td> <td>53.4 gals 202 liters</td> <td>54/32nd 43 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing													
168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm														
					<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th rowspan="2">Minimum Dual/Triple Spacing</th> </tr> <tr> <td>168 sq in 1,086 sq cm</td> <td>135 lbs 61 kgs</td> <td>53.4 gals 202 liters</td> <td>54/32nd 43 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing													
168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm														

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## 13.6 R24 121A8/118B TL AGRIBIB

MSPN: 97644

CAI: 123868

Load per tire (single)						Tire Technical Data												
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Unloaded Dimensions	Loaded Dimensions			Rims (preferred in bold)								
				1,220 lbs 555 kgs	6 psi 0.4 bar	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference									
		1,920 lbs 870 kgs	2,450 lbs 1,110 kgs	1,520 lbs 690 kgs	7 psi 0.5 bar	14.4 in 366 mm	47.1 in 1,197 mm	21.2 in 539 mm	140.1 in 3,559 mm	<b>W12</b> W11								
1,920 lbs 870 kgs	2,070 lbs 940 kgs	2,230 lbs 1,010 kgs	2,820 lbs 1,280 kgs	1,820 lbs 825 kgs	9 psi 0.6 bar	<table border="1"> <tr> <th colspan="2">Rolling Circumference Index</th> </tr> <tr> <td colspan="2">38</td> </tr> <tr> <th colspan="2">Number of Lugs</th> </tr> <tr> <td colspan="2">19 x 2</td> </tr> </table>					Rolling Circumference Index		38		Number of Lugs		19 x 2	
Rolling Circumference Index																		
38																		
Number of Lugs																		
19 x 2																		
2,120 lbs 960 kgs	2,290 lbs 1,040 kgs	2,470 lbs 1,120 kgs	3,130 lbs 1,420 kgs	2,020 lbs 915 kgs	12 psi 0.8 bar	<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th rowspan="2">Minimum Dual/Triple Spacing</th> </tr> <tr> <td>168 sq in 1,086 sq cm</td> <td>135 lbs 61 kgs</td> <td>53.4 gals 202 liters</td> <td>54/32nd 43 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing														
168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm															
2,310 lbs 1,050 kgs	2,520 lbs 1,145 kgs	2,700 lbs 1,225 kgs	3,430 lbs 1,555 kgs	2,220 lbs 1,005 kgs	15 psi 1.0 bar	<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th rowspan="2">Minimum Dual/Triple Spacing</th> </tr> <tr> <td>168 sq in 1,086 sq cm</td> <td>135 lbs 61 kgs</td> <td>53.4 gals 202 liters</td> <td>54/32nd 43 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing														
168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm															
2,510 lbs 1,140 kgs	2,740 lbs 1,245 kgs	2,940 lbs 1,335 kgs	3,740 lbs 1,695 kgs	2,410 lbs 1,095 kgs	17 psi 1.2 bar	<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th rowspan="2">Minimum Dual/Triple Spacing</th> </tr> <tr> <td>168 sq in 1,086 sq cm</td> <td>135 lbs 61 kgs</td> <td>53.4 gals 202 liters</td> <td>54/32nd 43 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing														
168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm															
2,710 lbs 1,230 kgs	2,980 lbs 1,350 kgs	3,170 lbs 1,440 kgs	4,050 lbs 1,835 kgs	2,610 lbs 1,185 kgs	20 psi 1.4 bar	<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th rowspan="2">Minimum Dual/Triple Spacing</th> </tr> <tr> <td>168 sq in 1,086 sq cm</td> <td>135 lbs 61 kgs</td> <td>53.4 gals 202 liters</td> <td>54/32nd 43 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing														
168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm															
2,910 lbs 1,320 kgs	3,200 lbs 1,450 kgs	3,420 lbs 1,550 kgs	4,340 lbs 1,970 kgs	2,810 lbs 1,275 kgs	23 psi 1.6 bar	<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th rowspan="2">Minimum Dual/Triple Spacing</th> </tr> <tr> <td>168 sq in 1,086 sq cm</td> <td>135 lbs 61 kgs</td> <td>53.4 gals 202 liters</td> <td>54/32nd 43 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing														
168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm															
			4,650 lbs 2,110 kgs		26 psi 1.8 bar	<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th rowspan="2">Minimum Dual/Triple Spacing</th> </tr> <tr> <td>168 sq in 1,086 sq cm</td> <td>135 lbs 61 kgs</td> <td>53.4 gals 202 liters</td> <td>54/32nd 43 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing														
168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm															
			4,810 lbs 2,180 kgs		28 psi 1.9 bar	<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th rowspan="2">Minimum Dual/Triple Spacing</th> </tr> <tr> <td>168 sq in 1,086 sq cm</td> <td>135 lbs 61 kgs</td> <td>53.4 gals 202 liters</td> <td>54/32nd 43 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing														
168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm															
						<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th rowspan="2">Minimum Dual/Triple Spacing</th> </tr> <tr> <td>168 sq in 1,086 sq cm</td> <td>135 lbs 61 kgs</td> <td>53.4 gals 202 liters</td> <td>54/32nd 43 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing														
168 sq in 1,086 sq cm	135 lbs 61 kgs	53.4 gals 202 liters	54/32nd 43 mm															

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





### 14.9 R24 126A8/123B TL AGRIBIB

MSPN: 75971

CAI: 123848

Load per tire (single)						*All load values are for maximum indicated speeds at low torque. *20 mph (30 km/h): high torque field work or max road speed. *All load values for ground slopes up to 20% (above 20% consult Michelin)							
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Tire Technical Data				Rims (preferred in bold) <b>W13</b> W11, W12			
					Unloaded Dimensions		Loaded Dimensions		Overall Width		Overall Diameter	Loaded Radius	Rolling Circumference
					1,460 lbs	6 psi							
					660 kgs	0.4 bar							
					2,250 lbs	7 psi					Tube CAI 171114		
					1,020 kgs	0.5 bar							
2,250 lbs	2,450 lbs	2,600 lbs	3,310 lbs	2,150 lbs	9 psi					Minimum Dual/Triple Spacing			
1,020 kgs	1,110 kgs	1,180 kgs	1,500 kgs	975 kgs	0.6 bar								
2,480 lbs	2,710 lbs	2,890 lbs	3,660 lbs	2,380 lbs	12 psi					Rolling Circumference Index 39			
1,125 kgs	1,230 kgs	1,310 kgs	1,660 kgs	1,080 kgs	0.8 bar								
2,710 lbs	2,970 lbs	3,160 lbs	4,020 lbs	2,610 lbs	15 psi					Number of Lugs 19 x 2			
1,230 kgs	1,345 kgs	1,435 kgs	1,825 kgs	1,185 kgs	1.0 bar								
2,950 lbs	3,230 lbs	3,450 lbs	4,380 lbs	2,830 lbs	17 psi					Gross Flat Plate			
1,340 kgs	1,465 kgs	1,565 kgs	1,985 kgs	1,285 kgs	1.2 bar								
3,190 lbs	3,480 lbs	3,730 lbs	4,730 lbs	3,060 lbs	20 psi					Tire Weight			
1,445 kgs	1,580 kgs	1,690 kgs	2,145 kgs	1,390 kgs	1.4 bar								
3,420 lbs	3,750 lbs	4,010 lbs	5,090 lbs	3,300 lbs	23 psi					100% Tire Volume			
1,550 kgs	1,700 kgs	1,820 kgs	2,310 kgs	1,495 kgs	1.6 bar								
					5,450 lbs	26 psi					Centerline Tread Depth		
					2,470 kgs	1.8 bar							
					5,620 lbs	28 psi					Minimum Dual/Triple Spacing		
					2,550 kgs	1.9 bar							
									Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	504 mm
									200 sq in	159 lbs	66.0 gals	60/32nd	19.8 in
									1,291 sq cm	72 kgs	250 liters	48 mm	504 mm

### 16.9 R24 134A8/131B TL AGRIBIB

MSPN: 97341

CAI: 123854

Load per tire (single)						*All load values are for maximum indicated speeds at low torque. *20 mph (30 km/h): high torque field work or max road speed. *All load values for ground slopes up to 20% (above 20% consult Michelin)							
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Tire Technical Data				Rims (preferred in bold) <b>DW15L</b> W14L, W15L			
					Unloaded Dimensions		Loaded Dimensions		Overall Width		Overall Diameter	Loaded Radius	Rolling Circumference
					1,740 lbs	6 psi							
					790 kgs	0.4 bar							
					2,800 lbs	7 psi					Tube CAI 170042		
					1,270 kgs	0.5 bar							
2,840 lbs	3,040 lbs	3,240 lbs	4,140 lbs	2,680 lbs	9 psi					Minimum Dual/Triple Spacing			
1,290 kgs	1,380 kgs	1,470 kgs	1,880 kgs	1,215 kgs	0.6 bar								
3,130 lbs	3,370 lbs	3,590 lbs	4,590 lbs	2,970 lbs	12 psi					Rolling Circumference Index 0			
1,420 kgs	1,530 kgs	1,630 kgs	2,080 kgs	1,345 kgs	0.8 bar								
3,430 lbs	3,690 lbs	3,950 lbs	5,030 lbs	3,250 lbs	15 psi					Number of Lugs 19 x 2			
1,555 kgs	1,675 kgs	1,790 kgs	2,280 kgs	1,475 kgs	1.0 bar								
3,710 lbs	4,020 lbs	4,300 lbs	5,470 lbs	3,540 lbs	17 psi					Gross Flat Plate			
1,685 kgs	1,825 kgs	1,950 kgs	2,480 kgs	1,605 kgs	1.2 bar								
4,010 lbs	4,340 lbs	4,650 lbs	5,910 lbs	3,830 lbs	20 psi					Tire Weight			
1,820 kgs	1,970 kgs	2,110 kgs	2,680 kgs	1,735 kgs	1.4 bar								
4,300 lbs	4,670 lbs	5,000 lbs	6,350 lbs	4,110 lbs	23 psi					100% Tire Volume			
1,950 kgs	2,120 kgs	2,270 kgs	2,880 kgs	1,865 kgs	1.6 bar								
					6,790 lbs	26 psi					Centerline Tread Depth		
					3,080 kgs	1.8 bar							
					7,010 lbs	28 psi					Minimum Dual/Triple Spacing		
					3,180 kgs	1.9 bar							
									Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	566 mm
									244 sq in	205 lbs	85.8 gals	69/32nd	22.3 in
									1,575 sq cm	93 kgs	325 liters	55 mm	566 mm

NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%



# MICHELIN AGRIBIB

## 12.4 R28 121A8/118B TL AGRIBIB

MSPN: 50465

CAI: 123832

Load per tire (single)					Tire Technical Data										
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	Pressure	Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold) <b>W11</b> W10						
					Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference							
		1,920 lbs 870 kgs	2,450 lbs 1,110 kgs	7 psi 0.5 bar	12.7 in 322 mm	49.7 in 1,262 mm	22.7 in 577 mm	148.2 in 3,764 mm							
1,920 lbs 870 kgs	2,070 lbs 940 kgs	2,230 lbs 1,010 kgs	2,820 lbs 1,280 kgs	9 psi 0.6 bar	<table border="1"> <tr> <td>Rolling Circumference Index</td> </tr> <tr> <td>0</td> </tr> <tr> <td>Number of Lugs</td> </tr> <tr> <td>20 x 2</td> </tr> </table>				Rolling Circumference Index	0	Number of Lugs	20 x 2			
Rolling Circumference Index															
0															
Number of Lugs															
20 x 2															
2,120 lbs 960 kgs	2,290 lbs 1,040 kgs	2,470 lbs 1,120 kgs	3,130 lbs 1,420 kgs	12 psi 0.8 bar											
2,310 lbs 1,050 kgs	2,520 lbs 1,145 kgs	2,700 lbs 1,225 kgs	3,430 lbs 1,555 kgs	15 psi 1.0 bar											
2,510 lbs 1,140 kgs	2,740 lbs 1,245 kgs	2,940 lbs 1,335 kgs	3,740 lbs 1,695 kgs	17 psi 1.2 bar					Tube MSPN 53377						
2,710 lbs 1,230 kgs	2,980 lbs 1,350 kgs	3,170 lbs 1,440 kgs	4,050 lbs 1,835 kgs	20 psi 1.4 bar					Tube CAI 170051						
2,910 lbs 1,320 kgs	3,200 lbs 1,450 kgs	3,420 lbs 1,550 kgs	4,340 lbs 1,970 kgs	23 psi 1.6 bar					Minimum Dual/Triple Spacing						
			4,500 lbs 2,040 kgs	25 psi 1.7 bar	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth							
			4,650 lbs 2,110 kgs	26 psi 1.8 bar	161 sq in 1,041 sq cm	130 lbs 59 kgs	47.3 gals 179 liters	50/32nd 40 mm	16.9 in 429 mm						
			4,810 lbs 2,180 kgs	28 psi 1.9 bar											

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

## 13.6 R28 123A8/120B TL AGRIBIB

MSPN: 87976

CAI: 123782

Load per tire (single)						Tire Technical Data									
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold) <b>W12</b> W11					
						Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference						
				1,300 lbs 590 kgs	6 psi 0.4 bar	14.6 in 372 mm	51.5 in 1,308 mm	23.3 in 592 mm	153.3 in 3,893 mm						
		2,050 lbs 930 kgs	2,620 lbs 1,190 kgs	1,630 lbs 740 kgs	7 psi 0.5 bar	<table border="1"> <tr> <td>Rolling Circumference Index</td> </tr> <tr> <td>39</td> </tr> <tr> <td>Number of Lugs</td> </tr> <tr> <td>20 x 2</td> </tr> </table>				Rolling Circumference Index	39	Number of Lugs	20 x 2		
Rolling Circumference Index															
39															
Number of Lugs															
20 x 2															
2,030 lbs 920 kgs	2,230 lbs 1,010 kgs	2,380 lbs 1,080 kgs	3,020 lbs 1,370 kgs	1,960 lbs 890 kgs	9 psi 0.6 bar										
2,240 lbs 1,015 kgs	2,470 lbs 1,120 kgs	2,630 lbs 1,195 kgs	3,350 lbs 1,520 kgs	2,170 lbs 985 kgs	12 psi 0.8 bar										
2,450 lbs 1,110 kgs	2,700 lbs 1,225 kgs	2,890 lbs 1,310 kgs	3,670 lbs 1,665 kgs	2,380 lbs 1,080 kgs	15 psi 1.0 bar					Tube MSPN 51627					
2,670 lbs 1,210 kgs	2,940 lbs 1,335 kgs	3,150 lbs 1,430 kgs	4,000 lbs 1,815 kgs	2,590 lbs 1,175 kgs	17 psi 1.2 bar					Tube CAI 170053					
2,880 lbs 1,305 kgs	3,170 lbs 1,440 kgs	3,410 lbs 1,545 kgs	4,320 lbs 1,960 kgs	2,800 lbs 1,270 kgs	20 psi 1.4 bar					Minimum Dual/Triple Spacing					
3,090 lbs 1,400 kgs	3,420 lbs 1,550 kgs	3,660 lbs 1,660 kgs	4,650 lbs 2,110 kgs	3,010 lbs 1,365 kgs	23 psi 1.6 bar	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth						
			4,970 lbs 2,255 kgs	26 psi 1.8 bar	182 sq in 1,172 sq cm	148 lbs 67 kgs	60.7 gals 230 liters	58/32nd 46 mm	18.3 in 465 mm						
			5,140 lbs 2,330 kgs	28 psi 1.9 bar											

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%







### 14.9 R28 128A8/125B TL AGRIBIB

MSPN: 47219

CAI: 123850

Load per tire (single)					
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure
				1,550 lbs	6 psi
				705 kgs	0.4 bar
		2,380 lbs	3,040 lbs	1,920 lbs	7 psi
		1,080 kgs	1,380 kgs	870 kgs	0.5 bar
2,400 lbs	2,580 lbs	2,760 lbs	3,510 lbs	2,270 lbs	9 psi
1,090 kgs	1,170 kgs	1,250 kgs	1,590 kgs	1,030 kgs	0.6 bar
2,650 lbs	2,850 lbs	3,050 lbs	3,880 lbs	2,510 lbs	12 psi
1,200 kgs	1,295 kgs	1,385 kgs	1,760 kgs	1,140 kgs	0.8 bar
2,900 lbs	3,130 lbs	3,350 lbs	4,250 lbs	2,760 lbs	15 psi
1,315 kgs	1,420 kgs	1,520 kgs	1,930 kgs	1,250 kgs	1.0 bar
3,140 lbs	3,420 lbs	3,660 lbs	4,630 lbs	3,010 lbs	17 psi
1,425 kgs	1,550 kgs	1,660 kgs	2,100 kgs	1,365 kgs	1.2 bar
3,400 lbs	3,690 lbs	3,960 lbs	5,020 lbs	3,250 lbs	20 psi
1,540 kgs	1,675 kgs	1,795 kgs	2,275 kgs	1,475 kgs	1.4 bar
3,640 lbs	3,970 lbs	4,250 lbs	5,390 lbs	3,490 lbs	23 psi
1,650 kgs	1,800 kgs	1,930 kgs	2,445 kgs	1,585 kgs	1.6 bar
			5,770 lbs		26 psi
			2,615 kgs		1.8 bar
			5,950 lbs		28 psi
			2,700 kgs		1.9 bar

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

Tire Technical Data																			
Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)															
Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference																
15.9 in	53.5 in	24.1 in	159.4 in	<b>W13</b> W12															
403 mm	1,358 mm	612 mm	4,050 mm																
<table border="1"> <tr><td>Rolling Circumference Index</td></tr> <tr><td>40</td></tr> <tr><td>Number of Lugs</td></tr> <tr><td>20 x 2</td></tr> </table>					Rolling Circumference Index	40	Number of Lugs	20 x 2											
Rolling Circumference Index																			
40																			
Number of Lugs																			
20 x 2																			
<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th>Minimum Dual/Triple Spacing</th> </tr> <tr> <td>206 sq in</td> <td>175 lbs</td> <td>74.0 gals</td> <td>59/32nd</td> <td>19.8 in</td> </tr> <tr> <td>1,332 sq cm</td> <td>80 kgs</td> <td>280 liters</td> <td>47 mm</td> <td>504 mm</td> </tr> </table>					Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	206 sq in	175 lbs	74.0 gals	59/32nd	19.8 in	1,332 sq cm	80 kgs	280 liters	47 mm	504 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing															
206 sq in	175 lbs	74.0 gals	59/32nd	19.8 in															
1,332 sq cm	80 kgs	280 liters	47 mm	504 mm															

### 16.9 R28 136A8/133B TL AGRIBIB

MSPN: 86531

CAI: 123856

Load per tire (single)					
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure
				1,900 lbs	6 psi
				860 kgs	0.4 bar
		2,950 lbs	3,770 lbs	2,360 lbs	7 psi
		1,340 kgs	1,710 kgs	1,070 kgs	0.5 bar
3,000 lbs	3,220 lbs	3,440 lbs	4,370 lbs	2,830 lbs	9 psi
1,360 kgs	1,460 kgs	1,560 kgs	1,980 kgs	1,285 kgs	0.6 bar
3,310 lbs	3,560 lbs	3,810 lbs	4,830 lbs	3,130 lbs	12 psi
1,500 kgs	1,615 kgs	1,730 kgs	2,190 kgs	1,420 kgs	0.8 bar
3,620 lbs	3,900 lbs	4,180 lbs	5,300 lbs	3,440 lbs	15 psi
1,640 kgs	1,770 kgs	1,895 kgs	2,405 kgs	1,560 kgs	1.0 bar
3,920 lbs	4,250 lbs	4,550 lbs	5,770 lbs	3,740 lbs	17 psi
1,780 kgs	1,930 kgs	2,065 kgs	2,615 kgs	1,695 kgs	1.2 bar
4,230 lbs	4,600 lbs	4,920 lbs	6,240 lbs	4,050 lbs	20 psi
1,920 kgs	2,085 kgs	2,230 kgs	2,830 kgs	1,835 kgs	1.4 bar
4,540 lbs	4,940 lbs	5,290 lbs	6,700 lbs	4,340 lbs	23 psi
2,060 kgs	2,240 kgs	2,400 kgs	3,040 kgs	1,970 kgs	1.6 bar
			7,180 lbs		26 psi
			3,255 kgs		1.8 bar
			7,410 lbs		28 psi
			3,360 kgs		1.9 bar

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

Tire Technical Data																			
Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)															
Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference																
17.7 in	56.2 in	25.2 in	166.9 in	<b>DW15L</b> W14L, DW14L, W15L															
450 mm	1,427 mm	641 mm	4,240 mm																
<table border="1"> <tr><td>Rolling Circumference Index</td></tr> <tr><td>41</td></tr> <tr><td>Number of Lugs</td></tr> <tr><td>20 x 2</td></tr> </table>					Rolling Circumference Index	41	Number of Lugs	20 x 2											
Rolling Circumference Index																			
41																			
Number of Lugs																			
20 x 2																			
<table border="1"> <tr> <th>Gross Flat Plate</th> <th>Tire Weight</th> <th>100% Tire Volume</th> <th>Centerline Tread Depth</th> <th>Minimum Dual/Triple Spacing</th> </tr> <tr> <td>262 sq in</td> <td>220 lbs</td> <td>95.6 gals</td> <td>64/32nd</td> <td>22.3 in</td> </tr> <tr> <td>1,690 sq cm</td> <td>100 kgs</td> <td>362 liters</td> <td>51 mm</td> <td>566 mm</td> </tr> </table>					Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing	262 sq in	220 lbs	95.6 gals	64/32nd	22.3 in	1,690 sq cm	100 kgs	362 liters	51 mm	566 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing															
262 sq in	220 lbs	95.6 gals	64/32nd	22.3 in															
1,690 sq cm	100 kgs	362 liters	51 mm	566 mm															

NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%



# MICHELIN AGRIBIB

## 16.9 R30 137A8/134B TL AGRIBIB

MSPN: 41545

CAI: 123870

Load per tire (single)						Tire Technical Data													
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)									
						Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference										
				1,940 lbs 880 kgs	6 psi 0.4 bar					<b>DW15L</b> W14L, DW14L, W15L									
		3,040 lbs 1,380 kgs	3,880 lbs 1,760 kgs	2,430 lbs 1,100 kgs	7 psi 0.5 bar	17.6 in 447 mm	58.3 in 1,480 mm	26.1 in 664 mm	173.0 in 4,395 mm										
3,090 lbs 1,400 kgs	3,310 lbs 1,500 kgs	3,530 lbs 1,600 kgs	4,500 lbs 2,040 kgs	2,910 lbs 1,320 kgs	9 psi 0.6 bar	<table border="1"> <tr> <td>Rolling Circumference Index</td> </tr> <tr> <td>42</td> </tr> <tr> <td>Number of Lugs</td> </tr> <tr> <td>19 x 2</td> </tr> </table>				Rolling Circumference Index	42	Number of Lugs	19 x 2	Minimum Dual/Triple Spacing					
Rolling Circumference Index																			
42																			
Number of Lugs																			
19 x 2																			
3,410 lbs 1,545 kgs	3,660 lbs 1,660 kgs	3,900 lbs 1,770 kgs	4,970 lbs 2,255 kgs	3,220 lbs 1,460 kgs	12 psi 0.8 bar														
3,730 lbs 1,690 kgs	4,010 lbs 1,820 kgs	4,290 lbs 1,945 kgs	5,460 lbs 2,475 kgs	3,530 lbs 1,600 kgs	15 psi 1.0 bar	<table border="1"> <tr> <td>Gross Flat Plate</td> <td>Tire Weight</td> <td>100% Tire Volume</td> <td>Centerline Tread Depth</td> <td></td> </tr> <tr> <td>267 sq in 1,724 sq cm</td> <td>217 lbs 98 kgs</td> <td>100.4 gals 380 liters</td> <td>62/32nd 49 mm</td> <td>22.3 in 566 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth		267 sq in 1,724 sq cm	217 lbs 98 kgs	100.4 gals 380 liters	62/32nd 49 mm	22.3 in 566 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth																
267 sq in 1,724 sq cm	217 lbs 98 kgs	100.4 gals 380 liters	62/32nd 49 mm	22.3 in 566 mm															
4,030 lbs 1,830 kgs	4,370 lbs 1,980 kgs	4,660 lbs 2,115 kgs	5,930 lbs 2,690 kgs	3,850 lbs 1,745 kgs	17 psi 1.2 bar														
4,350 lbs 1,975 kgs	4,720 lbs 2,140 kgs	5,050 lbs 2,290 kgs	6,420 lbs 2,910 kgs	4,160 lbs 1,885 kgs	20 psi 1.4 bar														
4,670 lbs 2,120 kgs	5,070 lbs 2,300 kgs	5,420 lbs 2,460 kgs	6,890 lbs 3,125 kgs	4,460 lbs 2,025 kgs	23 psi 1.6 bar														
			7,360 lbs 3,340 kgs		26 psi 1.8 bar														
			7,610 lbs 3,450 kgs		28 psi 1.9 bar														

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## 18.4 R30 142A8/139B TL AGRIBIB

MSPN: 42060

CAI: 123844

Load per tire (single)						Tire Technical Data													
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)									
						Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference										
				2,290 lbs 1,040 kgs	6 psi 0.4 bar					<b>DW16L</b> W15L, DW15L, W16L									
		3,510 lbs 1,590 kgs	4,480 lbs 2,030 kgs	2,820 lbs 1,280 kgs	7 psi 0.5 bar	19.8 in 504 mm	61.0 in 1,550 mm	27.3 in 695 mm	181.2 in 4,602 mm										
3,530 lbs 1,600 kgs	3,790 lbs 1,720 kgs	4,060 lbs 1,840 kgs	5,180 lbs 2,350 kgs	3,340 lbs 1,515 kgs	9 psi 0.6 bar	<table border="1"> <tr> <td>Rolling Circumference Index</td> </tr> <tr> <td>0</td> </tr> <tr> <td>Number of Lugs</td> </tr> <tr> <td>19 x 2</td> </tr> </table>				Rolling Circumference Index	0	Number of Lugs	19 x 2	Minimum Dual/Triple Spacing					
Rolling Circumference Index																			
0																			
Number of Lugs																			
19 x 2																			
3,890 lbs 1,765 kgs	4,200 lbs 1,905 kgs	4,500 lbs 2,040 kgs	5,730 lbs 2,600 kgs	3,700 lbs 1,680 kgs	12 psi 0.8 bar														
4,250 lbs 1,930 kgs	4,610 lbs 2,090 kgs	4,940 lbs 2,240 kgs	6,280 lbs 2,850 kgs	4,060 lbs 1,840 kgs	15 psi 1.0 bar	<table border="1"> <tr> <td>Gross Flat Plate</td> <td>Tire Weight</td> <td>100% Tire Volume</td> <td>Centerline Tread Depth</td> <td></td> </tr> <tr> <td>310 sq in 2,003 sq cm</td> <td>255 lbs 116 kgs</td> <td>124.1 gals 470 liters</td> <td>68/32nd 54 mm</td> <td>24.1 in 611 mm</td> </tr> </table>				Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth		310 sq in 2,003 sq cm	255 lbs 116 kgs	124.1 gals 470 liters	68/32nd 54 mm	24.1 in 611 mm
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth																
310 sq in 2,003 sq cm	255 lbs 116 kgs	124.1 gals 470 liters	68/32nd 54 mm	24.1 in 611 mm															
4,630 lbs 2,100 kgs	5,030 lbs 2,280 kgs	5,380 lbs 2,440 kgs	6,830 lbs 3,100 kgs	4,420 lbs 2,005 kgs	17 psi 1.2 bar														
4,990 lbs 2,265 kgs	5,430 lbs 2,465 kgs	5,820 lbs 2,640 kgs	7,400 lbs 3,355 kgs	4,770 lbs 2,165 kgs	20 psi 1.4 bar														
5,360 lbs 2,430 kgs	5,840 lbs 2,650 kgs	6,260 lbs 2,840 kgs	7,950 lbs 3,605 kgs	5,140 lbs 2,330 kgs	23 psi 1.6 bar														
			8,500 lbs 3,855 kgs		26 psi 1.8 bar														
			8,770 lbs 3,980 kgs		28 psi 1.9 bar														

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





### 380/85 R30 135A8/135B TL AGRIBIB

MSPN: 18784

CAI: 836509

Load per tire (single)					
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure
		2,340 lbs	3,200 lbs	1,900 lbs	6 psi
		1,060 kgs	1,450 kgs	860 kgs	0.4 bar
2,600 lbs	2,600 lbs	2,760 lbs	3,700 lbs	2,290 lbs	9 psi
1,180 kgs	1,180 kgs	1,250 kgs	1,680 kgs	1,040 kgs	0.6 bar
3,000 lbs	3,000 lbs	3,200 lbs	4,200 lbs	2,630 lbs	12 psi
1,360 kgs	1,360 kgs	1,450 kgs	1,905 kgs	1,195 kgs	0.8 bar
3,420 lbs	3,430 lbs	3,690 lbs	4,700 lbs	3,020 lbs	15 psi
1,550 kgs	1,555 kgs	1,675 kgs	2,130 kgs	1,370 kgs	1.0 bar
3,860 lbs	3,860 lbs	4,190 lbs	5,200 lbs	3,400 lbs	17 psi
1,750 kgs	1,750 kgs	1,900 kgs	2,360 kgs	1,540 kgs	1.2 bar
4,330 lbs	4,330 lbs	4,630 lbs	5,690 lbs	3,810 lbs	20 psi
1,965 kgs	1,965 kgs	2,100 kgs	2,580 kgs	1,730 kgs	1.4 bar
4,810 lbs	4,810 lbs	5,070 lbs	6,170 lbs	4,230 lbs	23 psi
2,180 kgs	2,180 kgs	2,300 kgs	2,800 kgs	1,920 kgs	1.6 bar
			6,500 lbs		25 psi
			2,950 kgs		1.7 bar
			6,830 lbs		26 psi
			3,100 kgs		1.8 bar
			7,170 lbs		28 psi
			3,250 kgs		1.9 bar

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

Tire Technical Data												
Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)								
Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference									
15.2 in	55.7 in	24.7 in	165.1 in	<b>W12</b> W13								
386 mm	1,416 mm	628 mm	4,194 mm									
<table border="1"> <tr><th colspan="2">Rolling Circumference Index</th></tr> <tr><td colspan="2">41</td></tr> <tr><th colspan="2">Number of Lugs</th></tr> <tr><td colspan="2">22 x 2</td></tr> </table>				Rolling Circumference Index		41		Number of Lugs		22 x 2		Tube MSPN 47204
Rolling Circumference Index												
41												
Number of Lugs												
22 x 2												
				Tube CAI 170054								
				Minimum Dual/Triple Spacing								
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	20.4 in								
241 sq in	177 lbs	73.7 gals	58/32nd	519 mm								
1,556 sq cm	80 kgs	279 liters	46 mm									

### 320/85 R34 133A8/130B TL AGRIBIB

MSPN: 73532

CAI: 122760

Load per tire (single)					
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure
		1,870 lbs	2,680 lbs	1,550 lbs	6 psi
		850 kgs	1,215 kgs	705 kgs	0.4 bar
1,980 lbs	2,150 lbs	2,270 lbs	3,110 lbs	1,900 lbs	9 psi
900 kgs	975 kgs	1,030 kgs	1,410 kgs	860 kgs	0.6 bar
2,270 lbs	2,470 lbs	2,680 lbs	3,550 lbs	2,170 lbs	12 psi
1,030 kgs	1,120 kgs	1,215 kgs	1,610 kgs	985 kgs	0.8 bar
2,910 lbs	3,200 lbs	3,420 lbs	4,410 lbs	2,810 lbs	17 psi
1,320 kgs	1,450 kgs	1,550 kgs	2,000 kgs	1,275 kgs	1.2 bar
3,530 lbs	3,860 lbs	4,190 lbs	5,360 lbs	3,400 lbs	23 psi
1,600 kgs	1,750 kgs	1,900 kgs	2,430 kgs	1,540 kgs	1.6 bar
3,970 lbs	4,300 lbs	4,540 lbs	6,170 lbs	3,780 lbs	29 psi
1,800 kgs	1,950 kgs	2,060 kgs	2,800 kgs	1,715 kgs	2.0 bar
4,080 lbs	4,420 lbs	4,670 lbs	6,330 lbs	3,890 lbs	32 psi
1,850 kgs	2,005 kgs	2,120 kgs	2,870 kgs	1,765 kgs	2.2 bar
4,190 lbs	4,540 lbs	4,810 lbs	6,480 lbs	4,000 lbs	35 psi
1,900 kgs	2,060 kgs	2,180 kgs	2,940 kgs	1,815 kgs	2.4 bar
			6,620 lbs		38 psi
			3,005 kgs		2.6 bar
			6,780 lbs		41 psi
			3,075 kgs		2.8 bar

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

Tire Technical Data												
Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)								
Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference									
12.6 in	55.9 in	25.6 in	166.9 in	<b>W10</b>								
320 mm	1,420 mm	651 mm	4,239 mm									
<table border="1"> <tr><th colspan="2">Rolling Circumference Index</th></tr> <tr><td colspan="2">41</td></tr> <tr><th colspan="2">Number of Lugs</th></tr> <tr><td colspan="2">24 x 2</td></tr> </table>				Rolling Circumference Index		41		Number of Lugs		24 x 2		Tube MSPN
Rolling Circumference Index												
41												
Number of Lugs												
24 x 2												
				Tube CAI								
				Minimum Dual/Triple Spacing								
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	17.1 in								
175 sq in	144 lbs	54.7 gals	49/32nd	434 mm								
1,129 sq cm	65 kgs	207 liters	39 mm									

**NOTE:**

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





# MICHELIN AGRIBIB

## 380/85 R34 137A8/137B TL AGRIBIB

MSPN: 59412

CAI: 122781

Load per tire (single)						Pressure	Tire Technical Data				
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual			Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold) <b>W12</b> W13
		2,470 lbs	3,420 lbs	2,000 lbs		6 psi	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference	
		1,120 kgs	1,550 kgs	905 kgs		0.4 bar	15.5 in	59.2 in	26.5 in	175.6 in	
2,760 lbs	2,760 lbs	2,910 lbs	3,950 lbs	2,430 lbs		9 psi	394 mm	1,503 mm	673 mm	4,461 mm	Minimum Dual/Triple Spacing 20.0 in 507 mm
1,250 kgs	1,250 kgs	1,320 kgs	1,790 kgs	1,100 kgs		0.6 bar	Rolling Circumference Index 42				
3,200 lbs	3,200 lbs	3,420 lbs	4,460 lbs	2,810 lbs		12 psi	Number of Lugs 23 x 2				
1,450 kgs	1,450 kgs	1,550 kgs	2,025 kgs	1,275 kgs		0.8 bar	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	
3,640 lbs	3,640 lbs	3,910 lbs	4,980 lbs	3,200 lbs		15 psi	254 sq in	189 lbs	81.1 gals	55/32nd	
1,650 kgs	1,650 kgs	1,775 kgs	2,260 kgs	1,450 kgs		1.0 bar	1,638 sq cm	86 kgs	307 liters	44 mm	
4,080 lbs	4,080 lbs	4,410 lbs	5,510 lbs	3,590 lbs		17 psi					
1,850 kgs	1,850 kgs	2,000 kgs	2,500 kgs	1,630 kgs		1.2 bar					
4,570 lbs	4,570 lbs	4,880 lbs	6,060 lbs	4,030 lbs		20 psi					
2,075 kgs	2,075 kgs	2,215 kgs	2,750 kgs	1,830 kgs		1.4 bar					
5,070 lbs	5,070 lbs	5,360 lbs	6,610 lbs	4,460 lbs		23 psi					
2,300 kgs	2,300 kgs	2,430 kgs	3,000 kgs	2,025 kgs		1.6 bar					
			6,940 lbs			25 psi					
			3,150 kgs			1.7 bar					
			7,280 lbs			26 psi					
			3,300 kgs			1.8 bar					
			7,610 lbs			28 psi					
			3,450 kgs			1.9 bar					

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## 420/90 R30 147A8/147B TL AGRIBIB

MSPN: 68713

CAI: 953332

Load per tire (single)						Pressure	Tire Technical Data				
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual			Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold) <b>DW13</b> W13, W14L, DW14L
		2,830 lbs	3,970 lbs	2,360 lbs		6 psi	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference	
		1,285 kgs	1,800 kgs	1,070 kgs		0.4 bar	17.4 in	60.4 in	27.2 in	179.4 in	
3,200 lbs	3,200 lbs	3,420 lbs	4,650 lbs	2,810 lbs		9 psi	443 mm	1,533 mm	690 mm	4,556 mm	Minimum Dual/Triple Spacing 21.7 in 552 mm
1,450 kgs	1,450 kgs	1,550 kgs	2,110 kgs	1,275 kgs		0.6 bar	Rolling Circumference Index 42				
3,750 lbs	3,750 lbs	3,970 lbs	5,320 lbs	3,300 lbs		12 psi	Number of Lugs 21 x 2				
1,700 kgs	1,700 kgs	1,800 kgs	2,415 kgs	1,495 kgs		0.8 bar	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	
4,800 lbs	4,800 lbs	5,070 lbs	6,690 lbs	4,210 lbs		17 psi	263 sq in	242 lbs	100.1 gals	55/32nd	
2,175 kgs	2,175 kgs	2,300 kgs	3,035 kgs	1,910 kgs		1.2 bar	1,697 sq cm	110 kgs	379 liters	44 mm	
5,840 lbs	5,840 lbs	6,170 lbs	8,050 lbs	5,140 lbs		23 psi					
2,650 kgs	2,650 kgs	2,800 kgs	3,650 kgs	2,330 kgs		1.6 bar					
6,390 lbs	6,390 lbs	6,780 lbs	9,370 lbs	5,620 lbs		29 psi					
2,900 kgs	2,900 kgs	3,075 kgs	4,250 kgs	2,550 kgs		2.0 bar					
6,590 lbs	6,590 lbs	7,080 lbs	9,650 lbs	5,800 lbs		32 psi					
2,990 kgs	2,990 kgs	3,210 kgs	4,375 kgs	2,630 kgs		2.2 bar					
6,780 lbs	6,780 lbs	7,390 lbs	9,920 lbs	5,960 lbs		35 psi					
3,075 kgs	3,075 kgs	3,350 kgs	4,500 kgs	2,705 kgs		2.4 bar					
			10,050 lbs			38 psi					
			4,560 kgs			2.6 bar					
			10,200 lbs			41 psi					
			4,625 kgs			2.8 bar					

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





**420/85 R34 142A8/142B TL AGRIBIB**  
**MSPN: 84230** **CAI: 042716**

Load per tire (single)					
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure
		2,870 lbs	3,970 lbs	2,360 lbs	6 psi
		1,300 kgs	1,800 kgs	1,070 kgs	0.4 bar
3,200 lbs	3,200 lbs	3,430 lbs	4,570 lbs	2,820 lbs	9 psi
1,450 kgs	1,450 kgs	1,555 kgs	2,075 kgs	1,280 kgs	0.6 bar
3,730 lbs	3,730 lbs	3,990 lbs	5,180 lbs	3,280 lbs	12 psi
1,690 kgs	1,690 kgs	1,810 kgs	2,350 kgs	1,490 kgs	0.8 bar
4,250 lbs	4,250 lbs	4,560 lbs	5,790 lbs	3,750 lbs	15 psi
1,930 kgs	1,930 kgs	2,070 kgs	2,625 kgs	1,700 kgs	1.0 bar
4,780 lbs	4,780 lbs	5,130 lbs	6,390 lbs	4,210 lbs	17 psi
2,170 kgs	2,170 kgs	2,325 kgs	2,900 kgs	1,910 kgs	1.2 bar
5,310 lbs	5,310 lbs	5,690 lbs	7,000 lbs	4,670 lbs	20 psi
2,410 kgs	2,410 kgs	2,580 kgs	3,175 kgs	2,120 kgs	1.4 bar
5,840 lbs	5,840 lbs	6,250 lbs	7,610 lbs	5,140 lbs	23 psi
2,650 kgs	2,650 kgs	2,835 kgs	3,450 kgs	2,330 kgs	1.6 bar
			7,990 lbs		25 psi
			3,625 kgs		1.7 bar
			8,380 lbs		26 psi
			3,800 kgs		1.8 bar
			8,760 lbs		28 psi
			3,975 kgs		1.9 bar

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

Tire Technical Data												
Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)								
Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference									
17.7 in	62.2 in	27.8 in	184.6 in	<b>DW15L</b> W13, W14L, DW14L, W15L								
449 mm	1,580 mm	707 mm	4,690 mm									
<table border="1"> <tr><th colspan="2">Rolling Circumference Index</th></tr> <tr><td colspan="2">43</td></tr> <tr><th colspan="2">Number of Lugs</th></tr> <tr><td colspan="2">20 x 2</td></tr> </table>				Rolling Circumference Index		43		Number of Lugs		20 x 2		Tube MSPN 37243
Rolling Circumference Index												
43												
Number of Lugs												
20 x 2												
				Tube CAI 171115								
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing								
275 sq in	238 lbs	101.2 gals	64/32nd	22.7 in								
1,774 sq cm	108 kgs	383 liters	51 mm	576 mm								

**420/85 R34 147A8/147B TL AGRIBIB**  
**MSPN: 30127** **CAI: 788910**

Load per tire (single)					
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure
		2,870 lbs	3,970 lbs	2,360 lbs	6 psi
		1,300 kgs	1,800 kgs	1,070 kgs	0.4 bar
3,200 lbs	3,200 lbs	3,440 lbs	4,570 lbs	2,820 lbs	9 psi
1,450 kgs	1,450 kgs	1,560 kgs	2,075 kgs	1,280 kgs	0.6 bar
3,740 lbs	3,740 lbs	4,000 lbs	5,180 lbs	3,300 lbs	12 psi
1,695 kgs	1,695 kgs	1,815 kgs	2,350 kgs	1,495 kgs	0.8 bar
4,810 lbs	4,810 lbs	5,140 lbs	6,390 lbs	4,230 lbs	17 psi
2,180 kgs	2,180 kgs	2,330 kgs	2,900 kgs	1,920 kgs	1.2 bar
5,840 lbs	5,840 lbs	6,250 lbs	7,610 lbs	5,140 lbs	23 psi
2,650 kgs	2,650 kgs	2,835 kgs	3,450 kgs	2,330 kgs	1.6 bar
6,310 lbs	6,310 lbs	6,750 lbs	8,920 lbs	5,560 lbs	29 psi
2,860 kgs	2,860 kgs	3,060 kgs	4,045 kgs	2,520 kgs	2.0 bar
6,550 lbs	6,550 lbs	7,000 lbs	9,240 lbs	5,770 lbs	32 psi
2,970 kgs	2,970 kgs	3,175 kgs	4,190 kgs	2,615 kgs	2.2 bar
6,780 lbs	6,780 lbs	7,250 lbs	9,550 lbs	5,970 lbs	35 psi
3,075 kgs	3,075 kgs	3,290 kgs	4,330 kgs	2,710 kgs	2.4 bar
			9,870 lbs		38 psi
			4,475 kgs		2.6 bar
			10,170 lbs		41 psi
			4,615 kgs		2.8 bar

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

Tire Technical Data												
Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)								
Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference									
17.9 in	62.8 in	28.5 in	187.0 in	<b>DW15L</b> W14L, DW14L, W15L, W13								
455 mm	1,595 mm	725 mm	4,751 mm									
<table border="1"> <tr><th colspan="2">Rolling Circumference Index</th></tr> <tr><td colspan="2">43</td></tr> <tr><th colspan="2">Number of Lugs</th></tr> <tr><td colspan="2">20 x 2</td></tr> </table>				Rolling Circumference Index		43		Number of Lugs		20 x 2		Tube MSPN 37243
Rolling Circumference Index												
43												
Number of Lugs												
20 x 2												
				Tube CAI 171115								
Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing								
254 sq in	238 lbs	101.2 gals	64/32nd	22.7 in								
1,641 sq cm	108 kgs	383 liters	51 mm	576 mm								

NOTE:  
 • When used as duals, tire load carrying capacity must be reduced 12%  
 • When used as triples, tire load carrying capacity must be reduced 18%



# MICHELIN AGRIBIB

## 18.4 R34 144A8/141B TL AGRIBIB

MSPN: 40989

CAI: 123846

Load per tire (single)						Pressure	Tire Technical Data														
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual			Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)										
				2,490 lbs		6 psi	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference		<b>DW16L</b> W15L, DW15L, W16L									
				1,130 kgs		0.4 bar	18.8 in	65.4 in	29.3 in	194.2 in											
		3,700 lbs	4,720 lbs	3,010 lbs		7 psi	477 mm	1,662 mm	744 mm	4,933 mm											
		1,680 kgs	2,140 kgs	1,365 kgs		0.5 bar	<table border="1"> <tr> <th colspan="2">Rolling Circumference Index</th> </tr> <tr> <td colspan="2">44</td> </tr> <tr> <th colspan="2">Number of Lugs</th> </tr> <tr> <td colspan="2">20 x 2</td> </tr> </table>				Rolling Circumference Index		44		Number of Lugs		20 x 2				
Rolling Circumference Index																					
44																					
Number of Lugs																					
20 x 2																					
3,750 lbs	4,010 lbs	4,300 lbs	5,470 lbs	3,530 lbs		9 psi	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing										
1,700 kgs	1,820 kgs	1,950 kgs	2,480 kgs	1,600 kgs		0.6 bar	315 sq in	274 lbs	139.2 gals	68/32nd	24.1 in										
4,130 lbs	4,440 lbs	4,760 lbs	6,050 lbs	3,910 lbs		12 psi	2,033 sq cm	125 kgs	527 liters	54 mm	611 mm										
1,875 kgs	2,015 kgs	2,160 kgs	2,745 kgs	1,775 kgs		0.8 bar															
4,520 lbs	4,870 lbs	5,220 lbs	6,640 lbs	4,290 lbs		15 psi															
2,050 kgs	2,210 kgs	2,370 kgs	3,010 kgs	1,945 kgs		1.0 bar															
4,920 lbs	5,310 lbs	5,690 lbs	7,220 lbs	4,670 lbs		17 psi															
2,230 kgs	2,410 kgs	2,580 kgs	3,275 kgs	2,120 kgs		1.2 bar															
5,300 lbs	5,740 lbs	6,150 lbs	7,800 lbs	5,050 lbs		20 psi															
2,405 kgs	2,605 kgs	2,790 kgs	3,540 kgs	2,290 kgs		1.4 bar															
5,690 lbs	6,170 lbs	6,610 lbs	8,390 lbs	5,430 lbs		23 psi															
2,580 kgs	2,800 kgs	3,000 kgs	3,805 kgs	2,465 kgs		1.6 bar															
			8,970 lbs			26 psi															
			4,070 kgs			1.8 bar															
			9,260 lbs			28 psi															
			4,200 kgs			1.9 bar															

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## 12.4 R36 124A8/121B TL AGRIBIB

MSPN: 03338

CAI: 123952

Load per tire (single)					Pressure	Tire Technical Data														
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h			Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)										
		2,120 lbs	2,690 lbs		7 psi	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference		<b>W11</b> W10									
		960 kgs	1,220 kgs		0.5 bar	12.5 in	57.5 in	26.5 in	171.8 in											
2,120 lbs	2,290 lbs	2,450 lbs	3,130 lbs		9 psi	318 mm	1,460 mm	673 mm	4,363 mm											
960 kgs	1,040 kgs	1,110 kgs	1,420 kgs		0.6 bar	<table border="1"> <tr> <th colspan="2">Rolling Circumference Index</th> </tr> <tr> <td colspan="2">41</td> </tr> <tr> <th colspan="2">Number of Lugs</th> </tr> <tr> <td colspan="2">24 x 2</td> </tr> </table>				Rolling Circumference Index		41		Number of Lugs		24 x 2				
Rolling Circumference Index																				
41																				
Number of Lugs																				
24 x 2																				
2,340 lbs	2,540 lbs	2,710 lbs	3,460 lbs		12 psi	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing										
1,060 kgs	1,150 kgs	1,230 kgs	1,570 kgs		0.8 bar	173 sq in	134 lbs	58.1 gals	42/32nd	16.9 in										
2,550 lbs	2,790 lbs	2,980 lbs	3,790 lbs		15 psi	1,113 sq cm	61 kgs	220 liters	33 mm	429 mm										
1,155 kgs	1,265 kgs	1,350 kgs	1,720 kgs		1.0 bar															
2,770 lbs	3,030 lbs	3,240 lbs	4,120 lbs		17 psi															
1,255 kgs	1,375 kgs	1,470 kgs	1,870 kgs		1.2 bar															
2,980 lbs	3,280 lbs	3,510 lbs	4,460 lbs		20 psi															
1,350 kgs	1,490 kgs	1,590 kgs	2,025 kgs		1.4 bar															
3,200 lbs	3,530 lbs	3,770 lbs	4,800 lbs		23 psi															
1,450 kgs	1,600 kgs	1,710 kgs	2,175 kgs		1.6 bar															
			4,960 lbs		25 psi															
			2,250 kgs		1.7 bar															
			5,130 lbs		26 psi															
			2,325 kgs		1.8 bar															
			5,290 lbs		28 psi															
			2,400 kgs		1.9 bar															

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





## 12.4 R38 125A8/122B TL AGRIBIB

MSPN: 50333

CAI: 123962

Load per tire (single)					*All load values are for maximum indicated speeds at low torque. *20 mph (30 km/h): high torque field work or max road speed. *All load values for ground slopes up to 20% (above 20% consult Michelin)													
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	Pressure	Tire Technical Data				Rims (preferred in bold)									
				2,180 lbs 990 kgs	2,780 lbs 1,260 kgs	7 psi 0.5 bar	Unloaded Dimensions			Loaded Dimensions								
2,180 lbs	2,360 lbs	2,540 lbs	3,220 lbs	9 psi	12.2 in	59.1 in	27.2 in	176.4 in	<b>W11</b> W10, DW10									
990 kgs	1,070 kgs	1,150 kgs	1,460 kgs	0.6 bar	311 mm	1,500 mm	691 mm	4,481 mm										
2,400 lbs	2,610 lbs	2,810 lbs	3,560 lbs	12 psi	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">42</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">24 x 2</td> </tr> </table>					Rolling Circumference Index		42		Number of Lugs		24 x 2		Tube MSPN
Rolling Circumference Index																		
42																		
Number of Lugs																		
24 x 2																		
1,090 kgs	1,185 kgs	1,275 kgs	1,615 kgs	0.8 bar						55286								
2,630 lbs	2,870 lbs	3,090 lbs	3,910 lbs	15 psi						Tube CAI								
1,195 kgs	1,300 kgs	1,400 kgs	1,775 kgs	1.0 bar						170072								
2,850 lbs	3,130 lbs	3,350 lbs	4,250 lbs	17 psi						Minimum Dual/Triple Spacing								
1,295 kgs	1,420 kgs	1,520 kgs	1,930 kgs	1.2 bar														
3,090 lbs	3,380 lbs	3,630 lbs	4,610 lbs	20 psi	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	16.9 in									
1,400 kgs	1,535 kgs	1,645 kgs	2,090 kgs	1.4 bar	182 sq in	139 lbs	58.1 gals	44/32nd										
3,310 lbs	3,640 lbs	3,900 lbs	4,950 lbs	23 psi	1,171 sq cm	63 kgs	220 liters	35 mm	429 mm									
1,500 kgs	1,650 kgs	1,770 kgs	2,245 kgs	1.6 bar														
				5,130 lbs	25 psi													
				2,325 kgs	1.7 bar													
				5,290 lbs	26 psi													
				2,400 kgs	1.8 bar													
				5,470 lbs	28 psi													
				2,480 kgs	1.9 bar													

## 13.6 R38 128A8/125B TL AGRIBIB

MSPN: 66666

CAI: 123992

Load per tire (single)						*All load values are for maximum indicated speeds at low torque. *20 mph (30 km/h): high torque field work or max road speed. *All load values for ground slopes up to 20% (above 20% consult Michelin)													
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Tire Technical Data				Rims (preferred in bold)									
				1,510 lbs	6 psi	Unloaded Dimensions		Loaded Dimensions			<b>DW12</b> W11, W12								
				685 kgs	0.4 bar	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference	Tube MSPN									
				2,380 lbs	3,040 lbs	1,900 lbs	7 psi	14.1 in	61.6 in		28.4 in	185.2 in							
				1,080 kgs	1,380 kgs	860 kgs	0.5 bar	358 mm	1,565 mm	722 mm	4,705 mm								
2,400 lbs	2,580 lbs	2,760 lbs	3,510 lbs	2,270 lbs	9 psi	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">43</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>					Rolling Circumference Index		43		Number of Lugs		22 x 2		Tube CAI
Rolling Circumference Index																			
43																			
Number of Lugs																			
22 x 2																			
1,090 kgs	1,170 kgs	1,250 kgs	1,590 kgs	1,030 kgs	0.6 bar						98232								
2,650 lbs	2,850 lbs	3,050 lbs	3,880 lbs	2,510 lbs	12 psi						Tube CAI								
1,200 kgs	1,295 kgs	1,385 kgs	1,760 kgs	1,140 kgs	0.8 bar						170079								
2,900 lbs	3,130 lbs	3,350 lbs	4,250 lbs	2,760 lbs	15 psi						Minimum Dual/Triple Spacing								
1,315 kgs	1,420 kgs	1,520 kgs	1,930 kgs	1,250 kgs	1.0 bar														
3,140 lbs	3,420 lbs	3,660 lbs	4,630 lbs	3,010 lbs	17 psi	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	18.3 in									
1,425 kgs	1,550 kgs	1,660 kgs	2,100 kgs	1,365 kgs	1.2 bar	187 sq in	180 lbs	76.6 gals	57/32nd										
3,400 lbs	3,690 lbs	3,960 lbs	5,020 lbs	3,250 lbs	20 psi	1,206 sq cm	82 kgs	290 liters	45 mm	465 mm									
1,540 kgs	1,675 kgs	1,795 kgs	2,275 kgs	1,475 kgs	1.4 bar														
3,640 lbs	3,970 lbs	4,250 lbs	5,390 lbs	3,490 lbs	23 psi														
1,650 kgs	1,800 kgs	1,930 kgs	2,445 kgs	1,585 kgs	1.6 bar														
				5,770 lbs	26 psi														
				2,615 kgs	1.8 bar														
				5,950 lbs	28 psi														
				2,700 kgs	1.9 bar														

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%



# MICHELIN AGRIBIB

## 380/80 R38 142A8/142B TL AGRIBIB

MSPN: 30231

CAI: 051026

Load per tire (single)						Pressure	Tire Technical Data											
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual			Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)							
		2,430 lbs	3,410 lbs	2,000 lbs		6 psi	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference		<b>DW12A</b> W12, DW12, W13, DW13						
		1,100 kgs	1,545 kgs	905 kgs		0.4 bar	15.0 in	62.1 in	28.5 in	185.4 in								
2,760 lbs	2,760 lbs	2,920 lbs	4,000 lbs	2,400 lbs		9 psi	380 mm	1,578 mm	723 mm	4,709 mm								
1,250 kgs	1,250 kgs	1,325 kgs	1,815 kgs	1,090 kgs		0.6 bar	<table border="1"> <tr> <th colspan="2">Rolling Circumference Index</th> </tr> <tr> <td colspan="2">43</td> </tr> <tr> <th colspan="2">Number of Lugs</th> </tr> <tr> <td colspan="2">23 x 2</td> </tr> </table>				Rolling Circumference Index		43		Number of Lugs		23 x 2	
Rolling Circumference Index																		
43																		
Number of Lugs																		
23 x 2																		
3,220 lbs	3,220 lbs	3,430 lbs	4,600 lbs	2,820 lbs		12 psi	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing							
1,460 kgs	1,460 kgs	1,555 kgs	2,085 kgs	1,280 kgs		0.8 bar	224 sq in	205 lbs	81.1 gals	58/32nd	20.0 in							
4,140 lbs	4,140 lbs	4,420 lbs	5,800 lbs	3,640 lbs		17 psi	1,446 sq cm	93 kgs	307 liters	46 mm	507 mm							
1,880 kgs	1,880 kgs	2,005 kgs	2,630 kgs	1,650 kgs		1.2 bar												
5,070 lbs	5,070 lbs	5,420 lbs	6,990 lbs	4,460 lbs		23 psi												
2,300 kgs	2,300 kgs	2,460 kgs	3,170 kgs	2,025 kgs		1.6 bar												
5,460 lbs	5,460 lbs	5,840 lbs	7,760 lbs	4,810 lbs		29 psi												
2,475 kgs	2,475 kgs	2,650 kgs	3,520 kgs	2,180 kgs		2.0 bar												
5,640 lbs	5,640 lbs	6,040 lbs	8,160 lbs	4,970 lbs		32 psi												
2,560 kgs	2,560 kgs	2,740 kgs	3,700 kgs	2,255 kgs		2.2 bar												
5,840 lbs	5,840 lbs	6,250 lbs	8,540 lbs	5,140 lbs		35 psi												
2,650 kgs	2,650 kgs	2,835 kgs	3,875 kgs	2,330 kgs		2.4 bar												
			8,690 lbs			38 psi												
			3,940 kgs			2.6 bar												
			8,820 lbs			41 psi												
			4,000 kgs			2.8 bar												

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## 380/80 R38 142A8/139D TL AGRIBIB

MSPN: 36989

CAI: 667404

Load per tire (single)						Pressure	Tire Technical Data											
40 mph 65 km/h	30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual			Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)						
			2,430 lbs	3,410 lbs	2,000 lbs	7 psi	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference	<b>DW12A</b> W12, DW12, W13, DW13							
			1,100 kgs	1,545 kgs	905 kgs	0.5 bar	15.0 in	62.1 in	28.5 in	185.4 in								
2,150 lbs	2,150 lbs	2,760 lbs	2,920 lbs	4,000 lbs	2,400 lbs	9 psi	380 mm	1,578 mm	723 mm	4,709 mm								
975 kgs	975 kgs	1,250 kgs	1,325 kgs	1,815 kgs	1,090 kgs	0.6 bar	<table border="1"> <tr> <th colspan="2">Rolling Circumference Index</th> </tr> <tr> <td colspan="2">43</td> </tr> <tr> <th colspan="2">Number of Lugs</th> </tr> <tr> <td colspan="2">23 x 2</td> </tr> </table>					Rolling Circumference Index		43		Number of Lugs		23 x 2
Rolling Circumference Index																		
43																		
Number of Lugs																		
23 x 2																		
2,490 lbs	2,490 lbs	3,220 lbs	3,430 lbs	4,600 lbs	2,820 lbs	12 psi	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	Minimum Dual/Triple Spacing							
1,130 kgs	1,130 kgs	1,460 kgs	1,555 kgs	2,085 kgs	1,280 kgs	0.8 bar	224 sq in	205 lbs	81.1 gals	58/32nd	20.0 in							
3,170 lbs	3,170 lbs	4,140 lbs	4,420 lbs	5,800 lbs	3,640 lbs	15 psi	1,446 sq cm	93 kgs	307 liters	46 mm	507 mm							
1,440 kgs	1,440 kgs	1,880 kgs	2,005 kgs	2,630 kgs	1,650 kgs	1.0 bar												
3,860 lbs	3,860 lbs	5,070 lbs	5,420 lbs	6,990 lbs	4,460 lbs	17 psi												
1,750 kgs	1,750 kgs	2,300 kgs	2,460 kgs	3,170 kgs	2,025 kgs	1.2 bar												
4,610 lbs	4,610 lbs	5,460 lbs	5,840 lbs	7,760 lbs	4,810 lbs	20 psi												
2,090 kgs	2,090 kgs	2,475 kgs	2,650 kgs	3,520 kgs	2,180 kgs	1.4 bar												
4,980 lbs	4,980 lbs	5,640 lbs	6,040 lbs	8,160 lbs	4,970 lbs	23 psi												
2,260 kgs	2,260 kgs	2,560 kgs	2,740 kgs	3,700 kgs	2,255 kgs	1.6 bar												
5,360 lbs	5,360 lbs	5,840 lbs	6,250 lbs	8,540 lbs	5,140 lbs	25 psi												
2,430 kgs	2,430 kgs	2,650 kgs	2,835 kgs	3,875 kgs	2,330 kgs	1.7 bar												
			8,690 lbs			26 psi												
			3,940 kgs			1.8 bar												
			8,820 lbs			28 psi												
			4,000 kgs			1.9 bar												

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%







### 380/95 R38 147A8/147B TL AGRIBIB

MSPN: 65207

CAI: 836033

Load per tire (single)						*All load values are for maximum indicated speeds at low torque. *20 mph (30 km/h): high torque field work or max road speed. *All load values for ground slopes up to 20% (above 20% consult Michelin)				
30 mph	25 mph	20 mph	6 mph	25 mph Dual	Pressure	Tire Technical Data				Rims (preferred in bold)
50 km/h	40 km/h	30 km/h	10 km/h	40 km/h Dual		Unloaded Dimensions		Loaded Dimensions		
2,680 lbs	2,680 lbs	2,870 lbs	2,870 lbs	2,360 lbs	6 psi	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference	<b>W12</b> W13
1,215 kgs	1,215 kgs	1,300 kgs	1,300 kgs	1,070 kgs	0.4 bar	15.4 in	66.5 in	30.3 in	198.2 in	
3,740 lbs	3,740 lbs	3,990 lbs	4,550 lbs	3,280 lbs	12 psi	392 mm	1,689 mm	769 mm	5,034 mm	Tube MSPN 98232
1,695 kgs	1,695 kgs	1,810 kgs	2,065 kgs	1,490 kgs	0.8 bar	Rolling Circumference Index 0				
4,780 lbs	4,780 lbs	5,130 lbs	6,240 lbs	4,210 lbs	17 psi	Number of Lugs 24 x 2				Minimum Dual/Triple Spacing
2,170 kgs	2,170 kgs	2,325 kgs	2,830 kgs	1,910 kgs	1.2 bar	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	
5,840 lbs	5,840 lbs	6,250 lbs	7,930 lbs	5,140 lbs	23 psi	235 sq in	254 lbs	100.6 gals	59/32nd	20.0 in
2,650 kgs	2,650 kgs	2,835 kgs	3,595 kgs	2,330 kgs	1.6 bar	1,515 sq cm	115 kgs	381 liters	47 mm	507 mm
6,070 lbs	6,070 lbs	6,500 lbs	8,760 lbs	5,350 lbs	26 psi					
2,755 kgs	2,755 kgs	2,950 kgs	3,975 kgs	2,425 kgs	1.8 bar					
6,310 lbs	6,310 lbs	6,750 lbs	9,040 lbs	5,560 lbs	29 psi					
2,860 kgs	2,860 kgs	3,060 kgs	4,100 kgs	2,520 kgs	2.0 bar					
6,550 lbs	6,550 lbs	7,000 lbs	9,330 lbs	5,750 lbs	32 psi					
2,970 kgs	2,970 kgs	3,175 kgs	4,230 kgs	2,610 kgs	2.2 bar					
6,780 lbs	6,780 lbs	7,250 lbs	9,600 lbs	5,960 lbs	35 psi					
3,075 kgs	3,075 kgs	3,290 kgs	4,355 kgs	2,705 kgs	2.4 bar					
			9,890 lbs		38 psi					
			4,485 kgs		2.6 bar					
			10,160 lbs		41 psi					
			4,610 kgs		2.8 bar					

### 420/85 R38 144A8/144B TL AGRIBIB

MSPN: 84239

CAI: 607820

Load per tire (single)						*All load values are for maximum indicated speeds at low torque. *20 mph (30 km/h): high torque field work or max road speed. *All load values for ground slopes up to 20% (above 20% consult Michelin)				
30 mph	25 mph	20 mph	6 mph	25 mph Dual	Pressure	Tire Technical Data				Rims (preferred in bold)
50 km/h	40 km/h	30 km/h	10 km/h	40 km/h Dual		Unloaded Dimensions		Loaded Dimensions		
		3,030 lbs	4,190 lbs	2,490 lbs	6 psi	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference	<b>DW15L</b> W14L, DW14L, W15L
		1,375 kgs	1,900 kgs	1,130 kgs	0.4 bar	17.9 in	66.0 in	29.5 in	195.9 in	
3,420 lbs	3,420 lbs	3,630 lbs	4,830 lbs	2,980 lbs	9 psi	455 mm	1,676 mm	750 mm	4,975 mm	Tube MSPN 69853
1,550 kgs	1,550 kgs	1,645 kgs	2,190 kgs	1,350 kgs	0.6 bar	Rolling Circumference Index 44				
3,970 lbs	3,970 lbs	4,220 lbs	5,480 lbs	3,470 lbs	12 psi	Number of Lugs 21 x 2				Minimum Dual/Triple Spacing
1,800 kgs	1,800 kgs	1,915 kgs	2,485 kgs	1,575 kgs	0.8 bar	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	
4,520 lbs	4,520 lbs	4,830 lbs	6,120 lbs	3,970 lbs	15 psi	290 sq in	259 lbs	109.6 gals	64/32nd	22.7 in
2,050 kgs	2,050 kgs	2,190 kgs	2,775 kgs	1,800 kgs	1.0 bar	1,874 sq cm	118 kgs	415 liters	51 mm	576 mm
5,070 lbs	5,070 lbs	5,420 lbs	6,760 lbs	4,450 lbs	17 psi					
2,300 kgs	2,300 kgs	2,460 kgs	3,065 kgs	2,020 kgs	1.2 bar					
5,620 lbs	5,620 lbs	6,020 lbs	7,410 lbs	4,940 lbs	20 psi					
2,550 kgs	2,550 kgs	2,730 kgs	3,360 kgs	2,240 kgs	1.4 bar					
6,170 lbs	6,170 lbs	6,610 lbs	8,050 lbs	5,430 lbs	23 psi					
2,800 kgs	2,800 kgs	3,000 kgs	3,650 kgs	2,465 kgs	1.6 bar					
			8,450 lbs		25 psi					
			3,835 kgs		1.7 bar					
			8,850 lbs		26 psi					
			4,015 kgs		1.8 bar					
			9,260 lbs		28 psi					
			4,200 kgs		1.9 bar					

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%



# MICHELIN AGRIBIB

## 18.4 R38 146A8/143B TL AGRIBIB

MSPN: 72676

CAI: 122771

Load per tire (single)						Pressure	Tire Technical Data															
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual			Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)											
				2,630 lbs		6 psi	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference		<b>DW16L</b> W15L, DW15L, W16L										
				1,195 kgs		0.4 bar	19.3 in	69.7 in	31.3 in	207.0 in												
		3,970 lbs	5,070 lbs	3,210 lbs		7 psi	491 mm	1,770 mm	795 mm	5,258 mm												
		1,800 kgs	2,300 kgs	1,455 kgs		0.5 bar	<table border="1"> <tr> <th colspan="2">Rolling Circumference Index</th> </tr> <tr> <td colspan="2">45</td> </tr> <tr> <th colspan="2">Number of Lugs</th> </tr> <tr> <td colspan="2">21 x 2</td> </tr> </table>				Rolling Circumference Index		45		Number of Lugs		21 x 2					
Rolling Circumference Index																						
45																						
Number of Lugs																						
21 x 2																						
3,970 lbs	4,300 lbs	4,610 lbs	5,860 lbs	3,780 lbs		9 psi																
1,800 kgs	1,950 kgs	2,090 kgs	2,660 kgs	1,715 kgs		0.6 bar					Tube MSPN 67917											
4,380 lbs	4,760 lbs	5,100 lbs	6,490 lbs	4,190 lbs		12 psi					Tube CAI 170151											
1,985 kgs	2,160 kgs	2,315 kgs	2,945 kgs	1,900 kgs		0.8 bar					Minimum Dual/Triple Spacing											
4,780 lbs	5,220 lbs	5,600 lbs	7,110 lbs	4,600 lbs		15 psi					24.1 in											
2,170 kgs	2,370 kgs	2,540 kgs	3,225 kgs	2,085 kgs		1.0 bar					611 mm											
5,200 lbs	5,690 lbs	6,080 lbs	7,740 lbs	5,000 lbs		17 psi																
2,360 kgs	2,580 kgs	2,760 kgs	3,510 kgs	2,270 kgs		1.2 bar																
5,610 lbs	6,150 lbs	6,580 lbs	8,360 lbs	5,410 lbs		20 psi																
2,545 kgs	2,790 kgs	2,985 kgs	3,790 kgs	2,455 kgs		1.4 bar																
6,020 lbs	6,610 lbs	7,080 lbs	8,980 lbs	5,820 lbs		23 psi	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth												
2,730 kgs	3,000 kgs	3,210 kgs	4,075 kgs	2,640 kgs		1.6 bar	356 sq in	305 lbs	151.9 gals	68/32nd												
			9,610 lbs			26 psi	2,297 sq cm	138 kgs	575 liters	54 mm												
			4,360 kgs			1.8 bar																
			9,920 lbs			28 psi																
			4,500 kgs			1.9 bar																

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## 520/85 R38 155A8/155B TL AGRIBIB

MSPN: 43308

CAI: 303668

Load per tire (single)						Pressure	Tire Technical Data														
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual			Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)										
		4,190 lbs	5,840 lbs	3,400 lbs		6 psi	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference		<b>DW16L</b> W16A, DD16, W18A, DD18									
		1,900 kgs	2,650 kgs	1,540 kgs		0.4 bar	20.9 in	73.0 in	32.3 in	217.7 in											
4,670 lbs	4,670 lbs	5,070 lbs	6,720 lbs	4,110 lbs		9 psi	530 mm	1,855 mm	821 mm	5,529 mm											
2,120 kgs	2,120 kgs	2,300 kgs	3,050 kgs	1,865 kgs		0.6 bar	<table border="1"> <tr> <th colspan="2">Rolling Circumference Index</th> </tr> <tr> <td colspan="2">46</td> </tr> <tr> <th colspan="2">Number of Lugs</th> </tr> <tr> <td colspan="2">23 x 2</td> </tr> </table>				Rolling Circumference Index		46		Number of Lugs		23 x 2				
Rolling Circumference Index																					
46																					
Number of Lugs																					
23 x 2																					
5,510 lbs	5,510 lbs	5,840 lbs	7,610 lbs	4,850 lbs		12 psi					Tube MSPN 80303										
2,500 kgs	2,500 kgs	2,650 kgs	3,450 kgs	2,200 kgs		0.8 bar					Tube CAI 170152										
6,170 lbs	6,230 lbs	6,720 lbs	8,490 lbs	5,480 lbs		15 psi					Minimum Dual/Triple Spacing										
2,800 kgs	2,825 kgs	3,050 kgs	3,850 kgs	2,485 kgs		1.0 bar					26.4 in										
6,970 lbs	6,940 lbs	7,610 lbs	9,370 lbs	6,110 lbs		17 psi					670 mm										
3,160 kgs	3,150 kgs	3,450 kgs	4,250 kgs	2,770 kgs		1.2 bar															
7,750 lbs	7,740 lbs	8,360 lbs	10,200 lbs	6,810 lbs		20 psi															
3,515 kgs	3,510 kgs	3,790 kgs	4,625 kgs	3,090 kgs		1.4 bar															
8,540 lbs	8,540 lbs	9,090 lbs	11,020 lbs	7,520 lbs		23 psi															
3,875 kgs	3,875 kgs	4,125 kgs	5,000 kgs	3,410 kgs		1.6 bar															
			11,610 lbs			25 psi	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth											
			5,265 kgs			1.7 bar	403 sq in	397 lbs	179.1 gals	64/32nd											
			12,200 lbs			26 psi	2,600 sq cm	180 kgs	678 liters	51 mm											
			5,535 kgs			1.8 bar															
			12,790 lbs			28 psi															
			5,800 kgs			1.9 bar															

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





## 480/80 R42 156A8/156B TL AGRIBIB

MSPN: 03395

CAI: 404096

Load per tire (single)						*All load values are for maximum indicated speeds at low torque. *20 mph (30 km/h): high torque field work or max road speed. *All load values for ground slopes up to 20% (above 20% consult Michelin)												
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Tire Technical Data				Rims (preferred in bold)								
		3,660 lbs 1,660 kgs	5,130 lbs 2,325 kgs	2,910 lbs 1,320 kgs	6 psi 0.4 bar	Unloaded Dimensions		Loaded Dimensions			DW16A W16A, DD16							
4,080 lbs 1,850 kgs	4,080 lbs 1,850 kgs	4,410 lbs 2,000 kgs	5,930 lbs 2,690 kgs	3,540 lbs 1,605 kgs	9 psi 0.6 bar	Overall Width 19.4 in 494 mm	Overall Diameter 73.1 in 1,858 mm	Loaded Radius 33.4 in 847 mm	Rolling Circumference 218.0 in 5,538 mm									
4,780 lbs 2,170 kgs	4,780 lbs 2,170 kgs	5,150 lbs 2,335 kgs	6,720 lbs 3,050 kgs	4,170 lbs 1,890 kgs	12 psi 0.8 bar	<table border="1"> <tr> <th colspan="2">Rolling Circumference Index</th> </tr> <tr> <td colspan="2">46</td> </tr> <tr> <th colspan="2">Number of Lugs</th> </tr> <tr> <td colspan="2">24 x 2</td> </tr> </table>				Rolling Circumference Index		46		Number of Lugs		24 x 2		
Rolling Circumference Index																		
46																		
Number of Lugs																		
24 x 2																		
6,190 lbs 2,810 kgs	6,190 lbs 2,810 kgs	6,650 lbs 3,015 kgs	8,320 lbs 3,775 kgs	5,430 lbs 2,465 kgs	17 psi 1.2 bar					Tube MSPN 51463								
7,610 lbs 3,450 kgs	7,610 lbs 3,450 kgs	8,140 lbs 3,690 kgs	9,920 lbs 4,500 kgs	6,690 lbs 3,035 kgs	23 psi 1.6 bar					Tube CAI 170084								
8,210 lbs 3,725 kgs	8,210 lbs 3,725 kgs	8,790 lbs 3,985 kgs	11,020 lbs 5,000 kgs	7,230 lbs 3,280 kgs	29 psi 2.0 bar					Minimum Dual/Triple Spacing 25.1 in 638 mm								
8,510 lbs 3,860 kgs	8,510 lbs 3,860 kgs	9,110 lbs 4,130 kgs	11,570 lbs 5,250 kgs	7,500 lbs 3,400 kgs	32 psi 2.2 bar													
8,820 lbs 4,000 kgs	8,820 lbs 4,000 kgs	9,440 lbs 4,280 kgs	12,130 lbs 5,500 kgs	7,760 lbs 3,520 kgs	35 psi 2.4 bar	Gross Flat Plate 318 sq in 2,051 sq cm	Tire Weight 395 lbs 179 kgs	100% Tire Volume 147.9 gals 560 liters	Centerline Tread Depth 69/32nd 55 mm									
			12,680 lbs 5,750 kgs		38 psi 2.6 bar													
			13,230 lbs 6,000 kgs		41 psi 2.8 bar													

## 520/85 R42 157A8/157B TL AGRIBIB

MSPN: 63687

CAI: 122791

Load per tire (single)						*All load values are for maximum indicated speeds at low torque. *20 mph (30 km/h): high torque field work or max road speed. *All load values for ground slopes up to 20% (above 20% consult Michelin)												
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Tire Technical Data				Rims (preferred in bold)								
		4,410 lbs 2,000 kgs	6,170 lbs 2,800 kgs	3,590 lbs 1,630 kgs	6 psi 0.4 bar	Unloaded Dimensions		Loaded Dimensions			DW18A W18A, DD18							
4,940 lbs 2,240 kgs	4,940 lbs 2,240 kgs	5,200 lbs 2,360 kgs	7,110 lbs 3,225 kgs	4,340 lbs 1,970 kgs	9 psi 0.6 bar	Overall Width 21.2 in 539 mm	Overall Diameter 76.6 in 1,945 mm	Loaded Radius 34.2 in 869 mm	Rolling Circumference 227.2 in 5,771 mm									
5,680 lbs 2,575 kgs	5,680 lbs 2,575 kgs	6,170 lbs 2,800 kgs	8,050 lbs 3,650 kgs	4,990 lbs 2,265 kgs	12 psi 0.8 bar	<table border="1"> <tr> <th colspan="2">Rolling Circumference Index</th> </tr> <tr> <td colspan="2">47</td> </tr> <tr> <th colspan="2">Number of Lugs</th> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		47		Number of Lugs		22 x 2		
Rolling Circumference Index																		
47																		
Number of Lugs																		
22 x 2																		
6,610 lbs 3,000 kgs	6,530 lbs 2,960 kgs	7,000 lbs 3,175 kgs	8,980 lbs 4,075 kgs	5,750 lbs 2,610 kgs	15 psi 1.0 bar					Tube MSPN 75465								
7,390 lbs 3,350 kgs	7,390 lbs 3,350 kgs	7,830 lbs 3,550 kgs	9,920 lbs 4,500 kgs	6,500 lbs 2,950 kgs	17 psi 1.2 bar					Tube CAI 170006								
8,250 lbs 3,740 kgs	8,250 lbs 3,740 kgs	8,730 lbs 3,960 kgs	10,800 lbs 4,900 kgs	7,250 lbs 3,290 kgs	20 psi 1.4 bar					Minimum Dual/Triple Spacing 27.3 in 694 mm								
9,090 lbs 4,125 kgs	9,090 lbs 4,125 kgs	9,650 lbs 4,375 kgs	11,680 lbs 5,300 kgs	8,000 lbs 3,630 kgs	23 psi 1.6 bar	Gross Flat Plate 426 sq in 2,750 sq cm	Tire Weight 447 lbs 203 kgs	100% Tire Volume 191.7 gals 726 liters	Centerline Tread Depth 74/32nd 59 mm									
			12,310 lbs 5,585 kgs		25 psi 1.7 bar													
			12,930 lbs 5,865 kgs		26 psi 1.8 bar													
			13,560 lbs 6,150 kgs		28 psi 1.9 bar													

**NOTE:**

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%



# MICHELIN AGRIBIB

## 420/80 R46 151A8/148B TL AGRIBIB

MSPN: 58733

CAI: 122770

Load per tire (single)						Pressure	Tire Technical Data				
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual			Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold) <b>DW13</b>
		3,200 lbs	4,410 lbs	2,560 lbs		6 psi	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference	
		1,450 kgs	2,000 kgs	1,160 kgs		0.4 bar	16.1 in	73.7 in	33.9 in	218.7 in	
3,200 lbs	3,530 lbs	3,750 lbs	5,160 lbs	3,110 lbs		9 psi	410 mm	1,872 mm	861 mm	5,555 mm	
1,450 kgs	1,600 kgs	1,700 kgs	2,340 kgs	1,410 kgs		0.6 bar	Rolling Circumference Index 46				Tube MSPN 31525
3,750 lbs	4,080 lbs	4,410 lbs	5,900 lbs	3,590 lbs		12 psi					Number of Lugs 26 x 2
1,700 kgs	1,850 kgs	2,000 kgs	2,675 kgs	1,630 kgs		0.8 bar	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	
4,940 lbs	5,360 lbs	5,680 lbs	7,390 lbs	4,720 lbs		17 psi	274 sq in	315 lbs	117.5 gals	64/32nd	21.7 in
2,240 kgs	2,430 kgs	2,575 kgs	3,350 kgs	2,140 kgs		1.2 bar	1,769 sq cm	143 kgs	445 liters	51 mm	552 mm
5,840 lbs	6,390 lbs	6,940 lbs	8,820 lbs	5,620 lbs		23 psi					
2,650 kgs	2,900 kgs	3,150 kgs	4,000 kgs	2,550 kgs		1.6 bar					
6,610 lbs	7,170 lbs	7,610 lbs	10,200 lbs	6,310 lbs		29 psi					
3,000 kgs	3,250 kgs	3,450 kgs	4,625 kgs	2,860 kgs		2.0 bar					
6,780 lbs	7,390 lbs	7,830 lbs	10,600 lbs	6,500 lbs		32 psi					
3,075 kgs	3,350 kgs	3,550 kgs	4,810 kgs	2,950 kgs		2.2 bar					
6,940 lbs	7,610 lbs	8,050 lbs	11,020 lbs	6,690 lbs		35 psi					
3,150 kgs	3,450 kgs	3,650 kgs	5,000 kgs	3,035 kgs		2.4 bar					
			11,190 lbs			38 psi					
			5,075 kgs			2.6 bar					
			11,350 lbs			41 psi					
			5,150 kgs			2.8 bar					

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## 480/80 R46 158A8/158B TL AGRIBIB

MSPN: 94069

CAI: 637231

Load per tire (single)						Pressure	Tire Technical Data				
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual			Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold) <b>DW16A</b> W16A, DD16, DW16L
		3,900 lbs	5,460 lbs	3,200 lbs		6 psi	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference	
		1,770 kgs	2,475 kgs	1,450 kgs		0.4 bar	19.6 in	76.7 in	35.0 in	231.3 in	
4,300 lbs	4,300 lbs	4,650 lbs	6,340 lbs	3,780 lbs		9 psi	499 mm	1,948 mm	889 mm	5,874 mm	
1,950 kgs	1,950 kgs	2,110 kgs	2,875 kgs	1,715 kgs		0.6 bar	Rolling Circumference Index 47				Tube MSPN 11549
5,000 lbs	5,000 lbs	5,390 lbs	7,220 lbs	4,280 lbs		12 psi					Number of Lugs 25 x 2
2,270 kgs	2,270 kgs	2,445 kgs	3,275 kgs	1,940 kgs		0.8 bar	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	
6,420 lbs	6,420 lbs	6,890 lbs	8,980 lbs	5,270 lbs		17 psi	349 sq in	402 lbs	158.2 gals	68/32nd	25.1 in
2,910 kgs	2,910 kgs	3,125 kgs	4,075 kgs	2,390 kgs		1.2 bar	2,251 sq cm	183 kgs	599 liters	54 mm	638 mm
7,830 lbs	7,830 lbs	8,380 lbs	10,750 lbs	6,260 lbs		23 psi					
3,550 kgs	3,550 kgs	3,800 kgs	4,875 kgs	2,840 kgs		1.6 bar					
8,600 lbs	8,600 lbs	9,200 lbs	11,850 lbs	7,250 lbs		29 psi					
3,900 kgs	3,900 kgs	4,175 kgs	5,375 kgs	3,290 kgs		2.0 bar					
8,980 lbs	8,980 lbs	9,610 lbs	12,410 lbs	7,750 lbs		32 psi					
4,075 kgs	4,075 kgs	4,360 kgs	5,630 kgs	3,515 kgs		2.2 bar					
9,370 lbs	9,370 lbs	10,030 lbs	12,960 lbs	8,250 lbs		35 psi					
4,250 kgs	4,250 kgs	4,550 kgs	5,880 kgs	3,740 kgs		2.4 bar					
			13,510 lbs			38 psi					
			6,130 kgs			2.6 bar					
			14,070 lbs			41 psi					
			6,380 kgs			2.8 bar					

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%







## 520/85 R46 158A8/155B TL AGRIBIB

MSPN: 57479

CAI: 122780

Load per tire (single)						*All load values are for maximum indicated speeds at low torque. *20 mph (30 km/h): high torque field work or max road speed. *All load values for ground slopes up to 20% (above 20% consult Michelin)				
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Tire Technical Data				Rims (preferred in bold)
		4,610 lbs 2,090 kgs	6,390 lbs 2,900 kgs	3,780 lbs 1,715 kgs	6 psi 0.4 bar	Unloaded Dimensions		Loaded Dimensions		
4,670 lbs	5,070 lbs	5,510 lbs	7,330 lbs	4,520 lbs	9 psi	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference	Tube MSPN 11549
2,120 kgs	2,300 kgs	2,500 kgs	3,325 kgs	2,050 kgs	0.6 bar	20.3 in	80.7 in	36.2 in	239.7 in	
5,450 lbs	5,930 lbs	6,420 lbs	8,270 lbs	5,270 lbs	12 psi	515 mm	2,050 mm	920 mm	6,088 mm	Minimum Dual/Triple Spacing
2,470 kgs	2,690 kgs	2,910 kgs	3,750 kgs	2,390 kgs	0.8 bar	Rolling Circumference Index				
6,220 lbs	6,790 lbs	7,320 lbs	9,200 lbs	6,020 lbs	15 psi	48				Minimum Dual/Triple Spacing
2,820 kgs	3,080 kgs	3,320 kgs	4,175 kgs	2,730 kgs	1.0 bar	Number of Lugs				
7,000 lbs	7,650 lbs	8,220 lbs	10,140 lbs	6,760 lbs	17 psi	22 x 2				26.4 in 670 mm
3,175 kgs	3,470 kgs	3,730 kgs	4,600 kgs	3,065 kgs	1.2 bar	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	
7,770 lbs	8,510 lbs	9,130 lbs	11,080 lbs	7,500 lbs	20 psi	441 sq in	485 lbs	204.7 gals	73/32nd	26.4 in 670 mm
3,525 kgs	3,860 kgs	4,140 kgs	5,025 kgs	3,400 kgs	1.4 bar	2,844 sq cm	220 kgs	775 liters	58 mm	
8,540 lbs	9,370 lbs	10,030 lbs	12,020 lbs	8,250 lbs	23 psi					26.4 in 670 mm
3,875 kgs	4,250 kgs	4,550 kgs	5,450 kgs	3,740 kgs	1.6 bar					
			12,700 lbs		25 psi					26.4 in 670 mm
			5,760 kgs		1.7 bar					
			13,380 lbs		26 psi					26.4 in 670 mm
			6,070 kgs		1.8 bar					
			14,070 lbs		28 psi					26.4 in 670 mm
			6,380 kgs		1.9 bar					

## 480/80 R50 159A8/159B TL AGRIBIB

MSPN: 94576

CAI: 471947

Load per tire (single)						*All load values are for maximum indicated speeds at low torque. *20 mph (30 km/h): high torque field work or max road speed. *All load values for ground slopes up to 20% (above 20% consult Michelin)				
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Tire Technical Data				Rims (preferred in bold)
		3,970 lbs 1,800 kgs	5,680 lbs 2,575 kgs	3,300 lbs 1,495 kgs	6 psi 0.4 bar	Unloaded Dimensions		Loaded Dimensions		
4,540 lbs	4,540 lbs	4,810 lbs	6,600 lbs	4,000 lbs	9 psi	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference	Tube MSPN
2,060 kgs	2,060 kgs	2,180 kgs	2,995 kgs	1,815 kgs	0.6 bar	18.7 in	80.9 in	37.1 in	241.5 in	
5,200 lbs	5,200 lbs	5,680 lbs	7,520 lbs	4,570 lbs	12 psi	474 mm	2,056 mm	942 mm	6,135 mm	Minimum Dual/Triple Spacing
2,360 kgs	2,360 kgs	2,575 kgs	3,410 kgs	2,075 kgs	0.8 bar	Rolling Circumference Index				
6,780 lbs	6,780 lbs	7,170 lbs	9,370 lbs	5,960 lbs	17 psi	48				24.6 in 626 mm
3,075 kgs	3,075 kgs	3,250 kgs	4,250 kgs	2,705 kgs	1.2 bar	Number of Lugs				
8,270 lbs	8,270 lbs	8,820 lbs	11,350 lbs	7,280 lbs	23 psi	26 x 2				24.6 in 626 mm
3,750 kgs	3,750 kgs	4,000 kgs	5,150 kgs	3,300 kgs	1.6 bar	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth	
9,090 lbs	9,090 lbs	9,650 lbs	13,230 lbs	8,000 lbs	29 psi	360 sq in	441 lbs	168.8 gals	71/32nd	24.6 in 626 mm
4,125 kgs	4,125 kgs	4,375 kgs	6,000 kgs	3,630 kgs	2.0 bar	2,322 sq cm	200 kgs	639 liters	56 mm	
9,370 lbs	9,370 lbs	9,920 lbs	13,560 lbs	8,250 lbs	32 psi					24.6 in 626 mm
4,250 kgs	4,250 kgs	4,500 kgs	6,150 kgs	3,740 kgs	2.2 bar					
9,650 lbs	9,650 lbs	10,200 lbs	13,890 lbs	8,490 lbs	35 psi					24.6 in 626 mm
4,375 kgs	4,375 kgs	4,625 kgs	6,300 kgs	3,850 kgs	2.4 bar					
			14,110 lbs		38 psi					24.6 in 626 mm
			6,400 kgs		2.6 bar					
			14,330 lbs		41 psi					24.6 in 626 mm
			6,500 kgs		2.8 bar					

**NOTE:**

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





# MICHELIN AGRIBIB

## 480/95 R50 164A8/164B TL AGRIBIB

MSPN: 54736

CAI: 491183

Load per tire (single)						Pressure	Tire Technical Data									
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual			Unloaded Dimensions		Loaded Dimensions		Rims (preferred in bold)					
		4,600 lbs	6,450 lbs	3,790 lbs		6 psi	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference		<b>DW16B (A)</b> DW15B (A)				
		2,085 kgs	2,925 kgs	1,720 kgs		0.4 bar	20.3 in	85.6 in	39.1 in	255.3 in						
5,200 lbs	5,200 lbs	5,570 lbs	7,210 lbs	4,590 lbs		9 psi	515 mm	2,175 mm	992 mm	6,484 mm						
2,360 kgs	2,360 kgs	2,525 kgs	3,270 kgs	2,080 kgs		0.6 bar	<table border="1"> <tr> <td>Rolling Circumference Index</td> </tr> <tr> <td>0</td> </tr> <tr> <td>Number of Lugs</td> </tr> <tr> <td>28 x 2</td> </tr> </table>				Rolling Circumference Index	0	Number of Lugs	28 x 2		
Rolling Circumference Index																
0																
Number of Lugs																
28 x 2																
6,100 lbs	6,100 lbs	6,510 lbs	8,330 lbs	5,370 lbs		12 psi					Tube MSPN					
2,765 kgs	2,765 kgs	2,955 kgs	3,780 kgs	2,435 kgs		0.8 bar					Tube CAI					
7,870 lbs	7,870 lbs	8,420 lbs	10,570 lbs	6,920 lbs		17 psi					Minimum Dual/Triple Spacing					
3,570 kgs	3,570 kgs	3,820 kgs	4,795 kgs	3,140 kgs		1.2 bar										
9,650 lbs	9,650 lbs	10,320 lbs	12,810 lbs	8,490 lbs		23 psi	Gross Flat Plate	Tire Weight	100% Tire Volume	Centerline Tread Depth						
4,375 kgs	4,375 kgs	4,680 kgs	5,810 kgs	3,850 kgs		1.6 bar	413 sq in	507 lbs	208.9 gals	67/32nd	25.1 in					
10,340 lbs	10,340 lbs	11,060 lbs	14,460 lbs	9,090 lbs		29 psi	2,662 sq cm	230 kgs	791 liters	53 mm	638 mm					
4,690 kgs	4,690 kgs	5,015 kgs	6,560 kgs	4,125 kgs		2.0 bar										
10,680 lbs	10,680 lbs	11,420 lbs	15,290 lbs	9,390 lbs		32 psi										
4,845 kgs	4,845 kgs	5,180 kgs	6,935 kgs	4,260 kgs		2.2 bar										
11,020 lbs	11,020 lbs	11,790 lbs	16,120 lbs	9,700 lbs		35 psi										
5,000 kgs	5,000 kgs	5,350 kgs	7,310 kgs	4,400 kgs		2.4 bar										
			16,330 lbs			38 psi										
			7,405 kgs			2.6 bar										
			16,530 lbs			41 psi										
			7,500 kgs			2.8 bar										

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)